

KEY FEATURES

- Professional LED downlight
- UGR <19 in accordance with EN-12464: 1 (workplace lighting requirements)
- External LED PHILIPS driver
- Very quick and easy installation
- 5 year Pragmalux Warranty



IP20 IK02  125LM/W UP TO  CRI ≥80

5 PRAGMALUX
YEAR
WARRANTY

DETAILS



Gloss reflector version



Detail extension ring

OPTIONS



1 HOUR
3 HOUR



1813/5



COLORS



ACCESSORIES



Extension ring
Ø145-165mm
9011261



Extension ring
Ø185-190mm
9011262



Extension ring
Ø210-230mm
9011263

SPECIFICATIONS

ITEM CODE	DESCRIPTION	W	LM	LM/W	KELVIN	LIFETIME L80B10	BEAM ANGLE
9114730	Pragmalux LED Downlight Comforti 12,6W 3000K 60D 1508lm Mat Ø230 F - G Ø210 UGR<19 +Philips DALI Driver	12.6	1508	120	3000	50000	60°
9114727	Pragmalux LED Downlight Comforti 12,6W 3000K 60D 1508lm Mat Ø230 F - G Ø210 UGR<19 +Philips Xitanium Driver	12.6	1508	120	3000	50000	60°
9114731	Pragmalux LED Downlight Comforti 12,6W 3000K 60D 1581lm Gloss Ø230 F - G Ø210 UGR<19 +Philips DALI Driver	12.6	1581	125	3000	50000	60°
9114728	Pragmalux LED Downlight Comforti 12,6W 3000K 60D 1581lm Gloss Ø230 F - G Ø210 UGR<19 +Philips Xitanium Driver	12.6	1581	125	3000	50000	60°
9114598	Pragmalux LED Downlight Comforti 12,7W 3000K 60D 1433lm Mat Ø165 F - G Ø145 UGR<19 +Philips DALI Driver	12.7	1433	112	3000	50000	60°
9114595	Pragmalux LED Downlight Comforti 12,7W 3000K 60D 1433lm Mat Ø165 F - G Ø145 UGR<19 +Philips Xitanium Driver	12.7	1433	112	3000	50000	60°
9114599	Pragmalux LED Downlight Comforti 12,7W 3000K 60D 1518lm Gloss Ø165 F - G Ø145 UGR<19 +Philips DALI Driver	12.7	1518	120	3000	50000	60°
9114596	Pragmalux LED Downlight Comforti 12,7W 3000K 60D 1518lm Gloss Ø165 F - G Ø145 UGR<19 +Philips Xitanium Driver	12.7	1518	112	3000	50000	60°
9114670	Pragmalux LED Downlight Comforti 12,8W 3000K 60D 1424lm Mat Ø190 F - G Ø165 UGR<19 +Philips DALI Driver	12.8	1424	100	3000	50000	60°
9114667	Pragmalux LED Downlight Comforti 12,8W 3000K 60D 1424lm Mat Ø190 F - G Ø165 UGR<19 +Philips Xitanium Driver	12.8	1424	100	3000	50000	60°
9114671	Pragmalux LED Downlight Comforti 12,8W 3000K 60D 1518lm Gloss Ø190 F - G Ø165 UGR<19 +Philips DALI Driver	12.8	1518	119	3000	50000	60°
9114668	Pragmalux LED Downlight Comforti 12,8W 3000K 60D 1518lm Gloss Ø190 F - G Ø165 UGR<19 +Philips Xitanium Driver	12.8	1518	119	3000	50000	60°
9114676	Pragmalux LED Downlight Comforti 13,1W 4000K 60D 1482lm Mat Ø190 F - G Ø165 UGR<19 +Philips DALI Driver	13.1	1482	113	4000	50000	60°
9114673	Pragmalux LED Downlight Comforti 13,1W 4000K 60D 1482lm Mat Ø190 F - G Ø165 UGR<19 +Philips Xitanium Driver	13.1	1482	113	4000	50000	60°
9114736	Pragmalux LED Downlight Comforti 13,1W 4000K 60D 1542lm Mat Ø230 F - G Ø210 UGR<19 +Philips DALI Driver	13.1	1542	118	4000	50000	60°
9114733	Pragmalux LED Downlight Comforti 13,1W 4000K 60D 1542lm Mat Ø230 F - G Ø210 UGR<19 +Philips Xitanium Driver	13.1	1542	118	4000	50000	60°
9114677	Pragmalux LED Downlight Comforti 13,1W 4000K 60D 1584lm Gloss Ø190 F - G Ø165 UGR<19 +Philips DALI Driver	13.1	1584	120	4000	50000	60°
9114674	Pragmalux LED Downlight Comforti 13,1W 4000K 60D 1584lm Gloss Ø190 F - G Ø165 UGR<19 +Philips Xitanium Driver	13.1	1584	120	4000	50000	60°
9114737	Pragmalux LED Downlight Comforti 13,1W 4000K 60D 1602lm Gloss Ø230 F - G Ø210 UGR<19 +Philips DALI Driver	13.1	1602	122	4000	50000	60°
9114734	Pragmalux LED Downlight Comforti 13,1W 4000K 60D 1602lm Gloss Ø230 F - G Ø210 UGR<19 +Philips Xitanium Driver	13.1	1602	122	4000	50000	60°
9114604	Pragmalux LED Downlight Comforti 13,2W 4000K 60D 1441lm Mat Ø165 F - G Ø145 UGR<19 +Philips DALI Driver	13.2	1441	110	4000	50000	60°
9114601	Pragmalux LED Downlight Comforti 13,2W 4000K 60D 1441lm Mat Ø165 F - G Ø145 UGR<19 +Philips Xitanium Driver	13.2	1441	110	4000	50000	60°
9114605	Pragmalux LED Downlight Comforti 13,2W 4000K 60D 1568lm Gloss Ø165 F - G Ø145 UGR<19 +Philips DALI Driver	13.2	1568	119	4000	50000	60°
9114602	Pragmalux LED Downlight Comforti 13,2W 4000K 60D 1568lm Gloss Ø165 F - G Ø145 UGR<19 +Philips Xitanium Driver	13.2	1568	119	4000	50000	60°
9114610	Pragmalux LED Downlight Comforti 18,3W 3000K 60D 2007lm Mat Ø165 F - G Ø145 UGR<19 +Philips DALI Driver	18.3	2007	110	3000	50000	60°
9114607	Pragmalux LED Downlight Comforti 18,3W 3000K 60D 2007lm Mat Ø165 F - G Ø145 UGR<19 +Philips Xitanium Driver	18.3	2007	110	3000	50000	60°
9114611	Pragmalux LED Downlight Comforti 18,3W 3000K 60D 2156lm Gloss Ø165 F - G Ø145 UGR<19 +Philips DALI Driver	18.3	2156	118	3000	50000	60°
9114608	Pragmalux LED Downlight Comforti 18,3W 3000K 60D 2156lm Gloss Ø165 F - G Ø145 UGR<19 +Philips Xitanium Driver	18.3	2156	118	3000	50000	60°

PRAGMALUX

All rights reserved. Pragmalux - PDL Lighting Group B.V. retains the right to modify product specifications without any prior notice or obligation and does not assume any liability for any consequences of using this document. Subject to errors and printing errors. Luminous flux tolerance: +/- 10%. Power consumption tolerance: +/- 10%.

Version: October 2020

ITEM CODE	DESCRIPTION	W	LM	LM/W	KELVIN	LIFETIME L80B10	BEAM ANGLE
9114616	Pragmalux LED Downlight Comforti 19,2W 4000K 60D 2048lm Mat Ø165 F - G Ø145 UGR<19 +Philips DALI Driver	19.2	2048	125	4000	50000	60°
9114613	Pragmalux LED Downlight Comforti 19,2W 4000K 60D 2048lm Mat Ø165 F - G Ø145 UGR<19 +Philips Xitanium Driver	19.2	2048	125	4000	50000	60°
9114617	Pragmalux LED Downlight Comforti 19,2W 4000K 60D 2193lm Gloss Ø165 F - G Ø145 UGR<19 +Philips DALI Driver	19.2	2193	115	4000	50000	60°
9114614	Pragmalux LED Downlight Comforti 19,2W 4000K 60D 2193lm Gloss Ø165 F - G Ø145 UGR<19 +Philips Xitanium Driver	19.2	2193	115	4000	50000	60°
9114694	Pragmalux LED Downlight Comforti 21,5W 3000K 60D 2304lm Mat Ø190 F - G Ø165 UGR<19 +Philips DALI Driver	21.5	2304	107	3000	50000	60°
9114691	Pragmalux LED Downlight Comforti 21,5W 3000K 60D 2304lm Mat Ø190 F - G Ø165 UGR<19 +Philips Xitanium Driver	21.5	2304	107	3000	50000	60°
9114622	Pragmalux LED Downlight Comforti 21,5W 3000K 60D 2319lm Mat Ø165 F - G Ø145 UGR<19 +Philips DALI Driver	21.5	2319	107	3000	50000	60°
9114619	Pragmalux LED Downlight Comforti 21,5W 3000K 60D 2319lm Mat Ø165 F - G Ø145 UGR<19 +Philips Xitanium Driver	21.5	2319	107	3000	50000	60°
9114695	Pragmalux LED Downlight Comforti 21,5W 3000K 60D 2469lm Gloss Ø190 F - G Ø165 UGR<19 +Philips DALI Driver	21.5	2469	115	3000	50000	60°
9114692	Pragmalux LED Downlight Comforti 21,5W 3000K 60D 2469lm Gloss Ø190 F - G Ø165 UGR<19 +Philips Xitanium Driver	21.5	2469	115	3000	50000	60°
9114623	Pragmalux LED Downlight Comforti 21,5W 3000K 60D 2480lm Gloss Ø165 F - G Ø145 UGR<19 +Philips DALI Driver	21.5	2480	115	3000	50000	60°
9114620	Pragmalux LED Downlight Comforti 21,5W 3000K 60D 2480lm Gloss Ø165 F - G Ø145 UGR<19 +Philips Xitanium Driver	21.5	2480	115	3000	50000	60°
9114754	Pragmalux LED Downlight Comforti 21,6W 3000K 60D 2461lm Mat Ø230 F - G Ø210 UGR<19 +Philips DALI Driver	21.6	2461	114	3000	50000	60°
9114751	Pragmalux LED Downlight Comforti 21,6W 3000K 60D 2461lm Mat Ø230 F - G Ø210 UGR<19 +Philips Xitanium Driver	21.6	2461	114	3000	50000	60°
9114755	Pragmalux LED Downlight Comforti 21,6W 3000K 60D 2587lm Gloss Ø230 F - G Ø210 UGR<19 +Philips DALI Driver	21.6	2587	119	3000	50000	60°
9114752	Pragmalux LED Downlight Comforti 21,6W 3000K 60D 2587lm Gloss Ø230 F - G Ø210 UGR<19 +Philips Xitanium Driver	21.6	2587	119	3000	50000	60°
9114628	Pragmalux LED Downlight Comforti 22,3W 4000K 60D 2348lm Mat Ø165 F - G Ø145 UGR<19 +Philips DALI Driver	22.3	2348	105	4000	50000	60°
9114625	Pragmalux LED Downlight Comforti 22,3W 4000K 60D 2348lm Mat Ø165 F - G Ø145 UGR<19 +Philips Xitanium Driver	22.3	2348	105	4000	50000	60°
9114629	Pragmalux LED Downlight Comforti 22,3W 4000K 60D 2545lm Gloss Ø165 F - G Ø145 UGR<19 +Philips DALI Driver	22.3	2545	114	4000	50000	60°
9114626	Pragmalux LED Downlight Comforti 22,3W 4000K 60D 2545lm Gloss Ø165 F - G Ø145 UGR<19 +Philips Xitanium Driver	22.3	2545	114	4000	50000	60°
9114760	Pragmalux LED Downlight Comforti 22,4W 4000K 60D 2509lm Mat Ø230 F - G Ø210 UGR<19 +Philips DALI Driver	22.4	2509	112	4000	50000	60°
9114757	Pragmalux LED Downlight Comforti 22,4W 4000K 60D 2509lm Mat Ø230 F - G Ø210 UGR<19 +Philips Xitanium Driver	22.4	2509	112	4000	50000	60°
9114761	Pragmalux LED Downlight Comforti 22,4W 4000K 60D 2626lm Gloss Ø230 F - G Ø210 UGR<19 +Philips DALI Driver	22.4	2626	117	4000	50000	60°
9114758	Pragmalux LED Downlight Comforti 22,4W 4000K 60D 2626lm Gloss Ø230 F - G Ø210 UGR<19 +Philips Xitanium Driver	22.4	2626	117	4000	50000	60°
9114700	Pragmalux LED Downlight Comforti 22,5W 4000K 60D 2442lm Mat Ø190 F - G Ø165 UGR<19 +Philips DALI Driver	22.5	2442	108	4000	50000	60°
9114697	Pragmalux LED Downlight Comforti 22,5W 4000K 60D 2442lm Mat Ø190 F - G Ø165 UGR<19 +Philips Xitanium Driver	22.5	2442	108	4000	50000	60°
9114701	Pragmalux LED Downlight Comforti 22,5W 4000K 60D 2574lm Gloss Ø190 F - G Ø165 UGR<19 +Philips DALI Driver	22.5	2574	114	4000	50000	60°
9114698	Pragmalux LED Downlight Comforti 22,5W 4000K 60D 2574lm Gloss Ø190 F - G Ø165 UGR<19 +Philips Xitanium Driver	22.5	2574	114	4000	50000	60°
9114706	Pragmalux LED Downlight Comforti 26,4W 3000K 60D 2735lm Mat Ø190 F - G Ø165 UGR<19 +Philips DALI Driver	26.4	2735	104	3000	50000	60°
9114703	Pragmalux LED Downlight Comforti 26,4W 3000K 60D 2735lm Mat Ø190 F - G Ø165 UGR<19 +Philips Xitanium Driver	26.4	2735	104	3000	50000	60°
9114707	Pragmalux LED Downlight Comforti 26,4W 3000K 60D 2917lm Gloss Ø190 F - G Ø165 UGR<19 +Philips DALI Driver	26.4	2917	110	3000	50000	60°
9114704	Pragmalux LED Downlight Comforti 26,4W 3000K 60D 2917lm Gloss Ø190 F - G Ø165 UGR<19 +Philips Xitanium Driver	26.4	2917	110	3000	50000	60°
9114712	Pragmalux LED Downlight Comforti 27,6W 4000K 60D 2889lm Mat Ø190 F - G Ø165 UGR<19 +Philips DALI Driver	27.6	2889	105	4000	50000	60°
9114709	Pragmalux LED Downlight Comforti 27,6W 4000K 60D 2889lm Mat Ø190 F - G Ø165 UGR<19 +Philips Xitanium Driver	27.6	2889	105	4000	50000	60°
9114713	Pragmalux LED Downlight Comforti 27,6W 4000K 60D 3058lm Gloss Ø190 F - G Ø165 UGR<19 +Philips DALI Driver	27.6	3058	110	4000	50000	60°
9114710	Pragmalux LED Downlight Comforti 27,6W 4000K 60D 3058lm Gloss Ø190 F - G Ø165 UGR<19 +Philips Xitanium Driver	27.6	3058	110	4000	50000	60°
9114718	Pragmalux LED Downlight Comforti 30,3W 3000K 60D 3106lm Mat Ø190 F - G Ø165 UGR<19 +Philips DALI Driver	30.3	3106	103	3000	50000	60°
9114715	Pragmalux LED Downlight Comforti 30,3W 3000K 60D 3106lm Mat Ø190 F - G Ø165 UGR<19 +Philips Xitanium Driver	30.3	3106	103	3000	50000	60°
9114719	Pragmalux LED Downlight Comforti 30,3W 3000K 60D 3306lm Gloss Ø190 F - G Ø165 UGR<19 +Philips DALI Driver	30.3	3306	109	3000	50000	60°
9114716	Pragmalux LED Downlight Comforti 30,3W 3000K 60D 3306lm Gloss Ø190 F - G Ø165 UGR<19 +Philips Xitanium Driver	30.3	3306	109	3000	50000	60°
9114646	Pragmalux LED Downlight Comforti 30,4W 3000K 60D 3106lm Mat Ø165 F - G Ø145 UGR<19 +Philips DALI Driver	30.4	3106	102	3000	50000	60°
9114643	Pragmalux LED Downlight Comforti 30,4W 3000K 60D 3106lm Mat Ø165 F - G Ø145 UGR<19 +Philips Xitanium Driver	30.4	3106	102	3000	50000	60°
9114647	Pragmalux LED Downlight Comforti 30,4W 3000K 60D 3324lm Gloss Ø165 F - G Ø145 UGR<19 +Philips DALI Driver	30.4	3324	109	3000	50000	60°
9114644	Pragmalux LED Downlight Comforti 30,4W 3000K 60D 3324lm Gloss Ø165 F - G Ø145 UGR<19 +Philips Xitanium Driver	30.4	3324	109	3000	50000	60°
9114778	Pragmalux LED Downlight Comforti 30,5W 3000K 60D 3322lm Mat Ø230 F - G Ø210 UGR<19 +Philips DALI Driver	30.5	3322	109	3000	50000	60°
9114775	Pragmalux LED Downlight Comforti 30,5W 3000K 60D 3322lm Mat Ø230 F - G Ø210 UGR<19 +Philips Xitanium Driver	30.5	3322	109	3000	50000	60°
9114779	Pragmalux LED Downlight Comforti 30,5W 3000K 60D 3463lm Gloss Ø230 F - G Ø210 UGR<19 +Philips DALI Driver	30.5	3463	113	3000	50000	60°
9114776	Pragmalux LED Downlight Comforti 30,5W 3000K 60D 3463lm Gloss Ø230 F - G Ø210 UGR<19 +Philips Xitanium Driver	30.5	3463	113	3000	50000	60°

PRAGMALUX



All rights reserved. Pragmalux - PDL Lighting Group B.V. retains the right to modify product specifications without any prior notice or obligation and does not assume any liability for any consequences of using this document. Subject to errors and printing errors. Luminous flux tolerance: +/- 10%. Power consumption tolerance: +/- 10%.

Version: October 2020

ITEM CODE	DESCRIPTION	W	LM	LM/W	KELVIN	LIFETIME L80B10	BEAM ANGLE
9114785	Pragmalux LED Downlight Comforti 31,3W 4000K 60D 3497lm Gloss Ø230 F - G Ø210 UGR<19 +Philips DALI Driver	31.3	3497	111	4000	50000	60°
9114782	Pragmalux LED Downlight Comforti 31,3W 4000K 60D 3497lm Gloss Ø230 F - G Ø210 UGR<19 +Philips Xitanium Driver	31.3	3497	111	4000	50000	60°
9114784	Pragmalux LED Downlight Comforti 31,3W 4000K 60D 3497lm Mat Ø230 F - G Ø210 UGR<19 +Philips DALI Driver	31.3	3497	111	4000	50000	60°
9114781	Pragmalux LED Downlight Comforti 31,3W 4000K 60D 3497lm Mat Ø230 F - G Ø210 UGR<19 +Philips Xitanium Driver	31.3	3497	111	4000	50000	60°
9114724	Pragmalux LED Downlight Comforti 31,6W 4000K 60D 3251lm Mat Ø190 F - G Ø165 UGR<19 +Philips DALI Driver	31.6	3251	103	4000	50000	60°
9114721	Pragmalux LED Downlight Comforti 31,6W 4000K 60D 3251lm Mat Ø190 F - G Ø165 UGR<19 +Philips Xitanium Driver	31.6	3251	103	4000	50000	60°
9114725	Pragmalux LED Downlight Comforti 31,6W 4000K 60D 3444lm Gloss Ø190 F - G Ø165 UGR<19 +Philips DALI Driver	31.6	3444	109	4000	50000	60°
9114722	Pragmalux LED Downlight Comforti 31,6W 4000K 60D 3444lm Gloss Ø190 F - G Ø165 UGR<19 +Philips Xitanium Driver	31.6	3444	109	4000	50000	60°
9114652	Pragmalux LED Downlight Comforti 31W 4000K 60D 3136lm Mat Ø165 F - G Ø145 UGR<19 +Philips DALI Driver	31	3136	101	4000	50000	60°
9114649	Pragmalux LED Downlight Comforti 31W 4000K 60D 3136lm Mat Ø165 F - G Ø145 UGR<19 +Philips Xitanium Driver	31	3136	101	4000	50000	60°
9114653	Pragmalux LED Downlight Comforti 31W 4000K 60D 3345lm Gloss Ø165 F - G Ø145 UGR<19 +Philips DALI Driver	31	3345	108	4000	50000	60°
9114650	Pragmalux LED Downlight Comforti 31W 4000K 60D 3345lm Gloss Ø165 F - G Ø145 UGR<19 +Philips Xitanium Driver	31	3345	108	4000	50000	60°

DIMENSIONS

DIMENSIONS RINGS

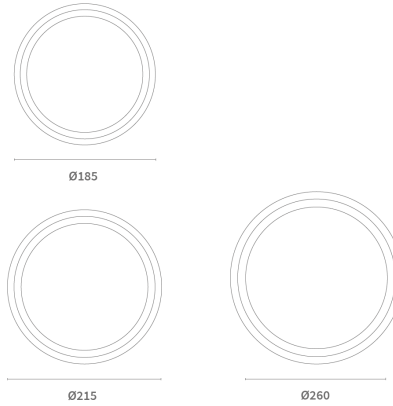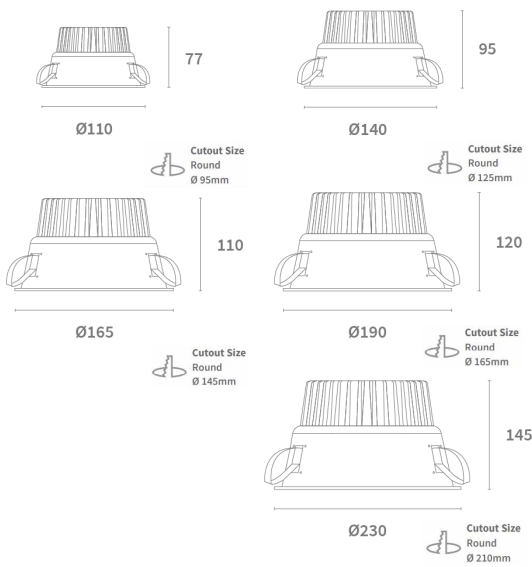

PHOTOMETRIC SPECIFICATIONS

LED DOWNLIGHT COMFORTI 21.6 3000K 60D 2461LM

