





Item Description	EAN	IP	Class	Ta (°C)	Vac	Hz	Power
Pragmalux Sensor t.b.v. LED Waterproof Zeus/Hermes	8720094608310	IP20	II	-25 ~ +60	220-240	50/60	0.5W

### Structure:

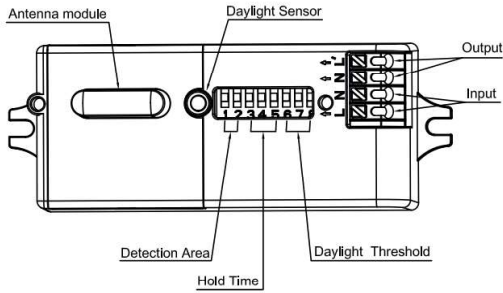


### Ceiling mounting:

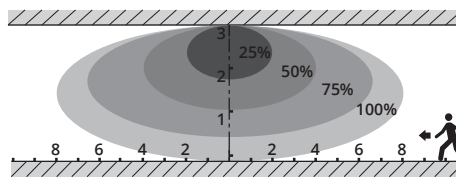


Ceiling mounted height: 3m  
Sensitivity: 100%/75%/50%/25%  
Slow moving speed (Speed: 0.3m/s)  
Max. mounting height: 6m\*  
\*At 6m mounting height 25% / 50% sensitivity is not able to detect motion signal.

### Wall mounting:

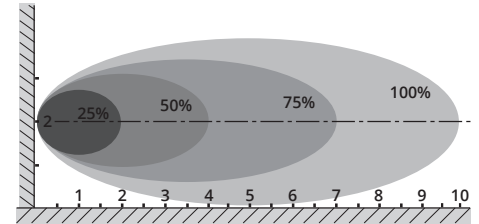


Wall mounted height: 2m  
Sensitivity: 100%/75%/50%/25%  
Slow moving speed (Speed: 0.3m/s)

### Wiring:

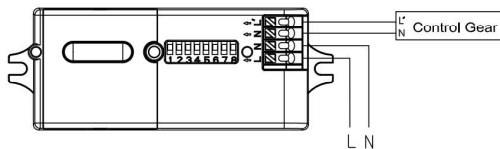

### DIP Switch settings:



Detection Area    Hold Time    Daylight  
Detectiegebied    Nalooptijd    Daglicht

#### Detection Area Detectiegebied

ON	1	2	
ON	ON	ON	100%
OFF	ON	ON	75%
ON	OFF	ON	50%
OFF	OFF	ON	25%

#### Hold Time Nalooptijd

ON	3	4	5	
ON	ON	ON	ON	5s
OFF	ON	ON	ON	30s
ON	OFF	ON	ON	90s
OFF	OFF	ON	ON	5min
ON	ON	OFF	ON	20min
OFF	OFF	OFF	ON	30min

#### Daylight Function Daglicht Functie

ON	6	7	8	
ON	ON	ON	ON	2lux
OFF	ON	ON	ON	10lux
ON	OFF	ON	ON	30lux
OFF	OFF	ON	ON	50lux
ON	ON	OFF	ON	Disable

### Warning ⚠

- Only qualified electrician is allowed to do installation, maintenance and inspection for safety concern. It is dangerous for non-professional operators.
- Power should be cut off before installation, maintenance or inspection.
- Please install and use the product strictly according to the instruction.
- Do not disassemble or remold the product at will to avoid accident of electric shock or light falling.
- Working out of temperature range of -20 ~ +40 will shorten the lifetime of the product.

