


ALTO LED 3-PHASE RAIL SPOT

PRAGMALUX
PROFESSIONAL LIGHTING



KEY FEATURES

Pragmalux LED 3-Phase Rail Spot Alto is a very compact cylindrical track spot and ideal for use in shops and showrooms to attractively accentuate walls and products. The special feature is that the LED driver is integrated in the adapter giving a minimalist look. Ideal if there is a low ceiling height. This product comes with a premium Philips SLM LED module CRI> 90 and Philips Xitanium LED driver.



5 PRAGMALUX
YEAR
WARRANTY

OPTIONS



COLORS



DETAILS



Black version



Grey version

SPECIFICATIONS

ITEM CODE	DESCRIPTION	W	LM	LM/W	KELVIN	LIFETIME L80B10	BEAM ANGLE
9172717	LED 3-Fase Railspot Alto 35W 3000K CRI>90 36D 3380lm Grijs	35	3380	97	3000	50000	36°
9172718	LED 3-Fase Railspot Alto 35W 3000K CRI>90 60D 3380lm Grijs	35	3380	97	3000	50000	60°
9172721	LED 3-Fase Railspot Alto 35W 3000K CRI>90 36D 3380lm Wit	35	3380	97	3000	50000	36°
9172722	LED 3-Fase Railspot Alto 35W 3000K CRI>90 60D 3380lm Wit	35	3380	97	3000	50000	60°
9172725	LED 3-Fase Railspot Alto 35W 3000K CRI>90 36D 3380lm Zwart	35	3380	97	3000	50000	36°
9172726	LED 3-Fase Railspot Alto 35W 3000K CRI>90 60D 3380lm Zwart	35	3380	97	3000	50000	60°
9172753	LED 3-Fase Railspot Alto 25W 4000K CRI>90 PW 36D 2970lm Grijs	25	2970	119	4000	50000	36°
9172754	LED 3-Fase Railspot Alto 25W 4000K CRI>90 PW 60D 2970lm Grijs	25	2970	119	4000	50000	60°
9172757	LED 3-Fase Railspot Alto 25W 4000K CRI>90 PW 36D 2970lm Wit	25	2970	119	4000	50000	36°
9172758	LED 3-Fase Railspot Alto 25W 4000K CRI>90 PW 60D 2970lm Wit	25	2970	119	4000	50000	60°
9172761	LED 3-Fase Railspot Alto 25W 4000K CRI>90 PW 36D 2970lm Zwart	25	2970	119	4000	50000	36°
9172762	LED 3-Fase Railspot Alto 25W 4000K CRI>90 PW 60D 2970lm Zwart	25	2970	119	4000	50000	60°
9172837	LED 3-Fase Railspot Alto 41W 3000K CRI>90 36D 4136lm Grijs	41	4136	101	3000	50000	36°
9172838	LED 3-Fase Railspot Alto 41W 3000K CRI>90 60D 4136lm Grijs	41	4136	101	3000	50000	60°
9172841	LED 3-Fase Railspot Alto 41W 3000K CRI>90 36D 4136lm Wit	41	4136	101	3000	50000	36°
9172842	LED 3-Fase Railspot Alto 41W 3000K CRI>90 60D 4136lm Wit	41	4136	101	3000	50000	60°
9172845	LED 3-Fase Railspot Alto 41W 3000K CRI>90 36D 4136lm Zwart	41	4136	101	3000	50000	36°
9172846	LED 3-Fase Railspot Alto 41W 3000K CRI>90 60D 4136lm Zwart	41	4136	101	3000	50000	60°
9172909	LED 3-Fase Railspot Alto 41W 4000K CRI>90 PW 36D 4455lm Grijs	41	4455	109	4000	50000	36°
9172910	LED 3-Fase Railspot Alto 41W 4000K CRI>90 PW 60D 4455lm Grijs	41	4455	109	4000	50000	60°
9172913	LED 3-Fase Railspot Alto 41W 4000K CRI>90 PW 36D 4455lm Wit	41	4455	109	4000	50000	36°
9172914	LED 3-Fase Railspot Alto 41W 4000K CRI>90 PW 60D 4455lm Wit	41	4455	109	4000	50000	60°
9172917	LED 3-Fase Railspot Alto 41W 4000K CRI>90 PW 36D 4455lm Zwart	41	4455	109	4000	50000	36°
9172918	LED 3-Fase Railspot Alto 41W 4000K CRI>90 PW 60D 4455lm Zwart	41	4455	109	4000	50000	60°

PRAGMALUX


All rights reserved. Pragmalux - PDL Lighting Group B.V. retains the right to modify product specifications without any prior notice or obligation and does not assume any liability for any consequences of using this document. Subject to errors and printing errors. Luminous flux tolerance: +/- 10%. Power consumption tolerance: +/- 10%.

Version: March 2021

Page 1/2

ALTO LED 3-PHASE RAIL SPOT

DIMENSIONS

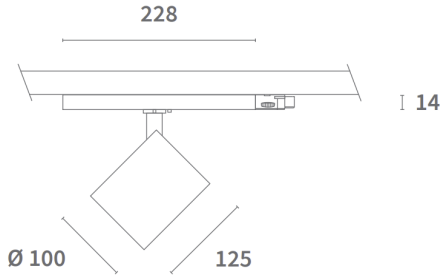

PHOTOMETRIC SPECIFICATIONS

LED 3 PHASE SPOT ALTO 25W 3000K 36D

