



Structure:

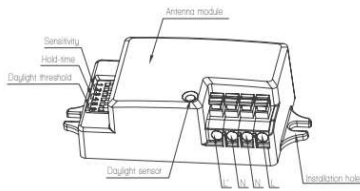

DIP Switch settings:



Detection Area Hold Time Daylight
 Detectiegebied Nalooptijd Daglicht

⚠ ATTENTION!
 To change the sensor settings the PCB must be unscrew to have access to the dipswitches (follow the instructions manual STEP 1-STEP 4).

Detection Area Detectiegebied

ON		1	2			
ON	ON	100%		100%	7-8 m	
ON	OFF	75%		75%	6-7m	
OFF	ON	50%		50%	4-5m	
OFF	OFF	10%		10%	1-1.5m	

Hold Time Nalooptijd

ON		3	4	
ON	ON	5s		
ON	OFF	90s		
OFF	ON	5min		
OFF	OFF	15min		

Hold Time:
 This determines the time the lamp remains at 100%. It can be set at 5s, 90s, 5min or 15min.

Nalooptijd:
 Dit bepaalt de tijd dat het armatuur op 100% niveau blijft branden. Dit kan ingesteld worden op 5s, 90s, 5min of 15min.


Daylight Function Daglicht Functie

ON		5	6	
ON	ON	Disable		
ON	OFF	50 lux		
OFF	ON	10 lux		
OFF	OFF	2 lux		

Daylight function:
 When the lux level is below selected setting of 2, 10 or 50 lux (night/dusk), and motion is detected the lamp turns on. After set hold time has elapsed the lamp will turn off, and remain off until motion is detected again. At dawn/daytime when the lux level is above 2, 10 or 50 lux the lamp will remain off even when motion is detected.

Daglicht functie:
 Wanneer het omgevingslicht onder de 2, 10 of 50 lux (nacht/schemer) komt schakelt het armatuur automatisch aan ná detectie van beweging. Na afloop van de nalooptijd schakelt het armatuur automatisch uit, totdat er weer detectie is waargenomen. Wanneer het omgevingslicht overdag boven de 2, 10 of 50 lux komt blijft het armatuur uit, ondanks dat er beweging wordt gedetecteerd.

Wall mounting:

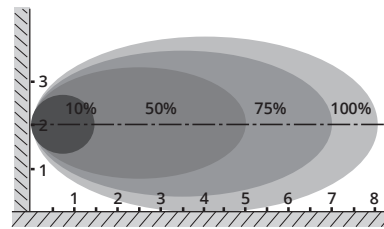

Wall mounted height: 2.4m
 (*max. 8m installation height)
 Sensitivity: 100%/75%/50%/10%
 Slow moving speed (Speed: 0.3m/s)


Factory Setting:

Detection Area: 75% / Hold Time:5min / Daylight Function: Disable

Fabriekinstelling:

Detectiegebied: 75% / Nalooptijd:5min/ Daglicht Functie: Uitschakelen

Ceiling mounting:

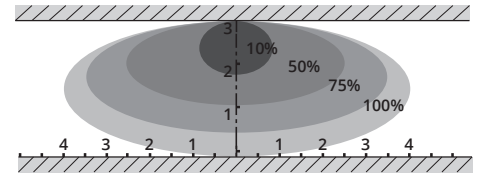

Ceiling mounted height: 3m
 (*max. 8m installation height)
 Sensitivity: 100%/75%/50%/10%
 Slow moving speed (Speed: 0.3m/s)

Warning

- Only qualified electrician is allowed to do installation, maintenance and inspection for safety concern. It is dangerous for non-professional operators.
- Power should be cut off before installation, maintenance or inspection.
- Please install and use the product strictly according to the instruction.
- Do not disassemble or remold the product at will to avoid accident of electric shock or light falling.
- Working out of temperature range of -20 ~ +50 will shorten the lifetime of the product.

