



KEY FEATURES

- Equipped with a total Philips system: Xitanium LED Drivers, Fortimo PCB and LED chips
- Suitable for suspended ceilings with visible profiles
- The highest quality aluminum reflector MIRO-Silver® for 98% reflection
- Shielding made of high-quality PMMA material
- Very high lumen / watt ratio, or efficacy > 125 lm / w
- Very low glare UGR <16 in accordance with EN-12464-1 (workplace lighting requirements)
- Very high color consistency / binning / SDCM <3
- Plug & play connection via Wieland GST18i3 or GST18i5
- Optionally available with air slots (Air)
- 5 year Pragmalux Warranty

IP40 IK02  UGR<16

5 PRAGMALUX
YEAR
WARRANTY

DETAILS



1200/1500x300 version



Reflector

OPTIONS



SPECIFICATIONS

ITEM CODE	DESCRIPTION	W	LM	LM/W	KELVIN	CRI	LIFETIME L80B10	BEAM ANGLE
61231030	LED Panel Miro 600 29-34W 3625-4250lm 830 Matt	29-34	3625-4250	125	3000	≥80	100000	80°
61241030	LED Panel Miro 600 29-34W 3700-4480lm 840 Matt	29-34	3700-4480	127	4000	≥80	100000	80°
61131030	LED Panel Miro 600 29-34W 3625-4250lm 830 Gloss	29-34	3625-4250	125	3000	≥80	100000	80°
61141030	LED Panel Miro 600 29-34W 3800-4400lm 840 Gloss	29-34	3800-4400	131	4000	≥80	100000	80°
62231030	LED Panel Miro 600 29-34W 3625-4250lm 830 Matt DALI	29-34	3625-4250	125	3000	≥80	100000	80°
62241030	LED Panel Miro 600D 29-34W 3700-4480lm 840 Matt DALI	29-34	3700-4480	127	4000	≥80	100000	80°
62131030	LED Panel Miro 600 29-34W 3625-4250lm 830 Gloss DALI	29-34	3625-4250	125	3000	≥80	100000	80°
62141030	LED Panel Miro 600 29-34W 3800-4400lm 840 Gloss DALI	29-34	3800-4400	131	4000	≥80	100000	80°
21231030	LED Panel Miro 1200 29-34W 3625-4250lm 830 Matt	29-34	3625-4250	125	3000	≥80	100000	80°
21241030	LED Panel Miro 1200 29-34W 3700-4480lm 840 Matt	29-34	3700-4480	127	4000	≥80	100000	80°
21131030	LED Panel Miro 1200 29-34W 3625-4250lm 830 Gloss	29-34	3625-4250	125	3000	≥80	100000	80°
21141030	LED Panel Miro 1200 29-34W 3800-4400lm 840 Gloss	29-34	3800-4400	131	4000	≥80	100000	80°
22231030	LED Panel Miro 1200 29-34W 3625-4250lm 830 Matt DALI	29-34	3625-4250	125	3000	≥80	100000	80°
22241030	LED Panel Miro 1200 29-34W 3700-4480lm 840 Matt DALI	29-34	3700-4480	127	4000	≥80	100000	80°
22131030	LED Panel Miro 1200 29-34W 3625-4250lm 830 Gloss DALI	29-34	3625-4250	125	3000	≥80	100000	80°
22141030	LED Panel Miro 1200 29-34W 3800-4400lm 840 Gloss DALI	29-34	3800-4400	131	4000	≥80	100000	80°
51231030	LED Panel Miro 1500 40-61W 5000-7625lm 830 Matt	40-61	5000-7625	125	3000	≥80	100000	80°
51241030	LED Panel Miro 1500 40-61W 5000-7625lm 840 Matt	40-61	5000-7625	125	3000	≥80	100000	80°
51131030	LED Panel Miro 1500 40-61W 5000-7625lm 830 Gloss	40-61	5000-7625	125	3000	≥80	100000	80°
51141030	LED Panel Miro 1500 40-61W 5100-7800lm 840 Gloss	40-61	5100-7800	127	4000	≥80	100000	80°
52231030	LED Panel Miro 1500 40-61W 5000-7625lm 830 Matt DALI	40-61	5000-7625	125	3000	≥80	100000	80°
52241030	LED Panel Miro 1500 40-61W 5000-7625lm 840 Matt DALI	40-61	5000-7625	125	3000	≥80	100000	80°
52131030	LED Panel Miro 1500 40-61W 5000-7625lm 830 Gloss DALI	40-61	5000-7625	125	3000	≥80	100000	80°
52141030	LED Panel Miro 1500 40-61W 5100-7800lm 840 Gloss DALI	40-61	5100-7800	127	4000	≥80	100000	80°

PRAGMALUX

All rights reserved. Pragmalux - PDL Lighting Group B.V. retains the right to modify product specifications without any prior notice or obligation and does not assume any liability for any consequences of using this document. Subject to errors and printing errors. Luminous flux tolerance: +/- 10%. Power consumption tolerance: +/- 10%.

ELECTRICAL DATA

Voltage (V)	220-240
Frequency (Hz)	50/60
Power factor (λ)	≥0.90
Operating mode	External LED Driver
Total harmonic distortion	≤ 20 %

TEMPERATURES & OPERATING CONDITIONS

Ambient temperature	25°C
Operating temperature	-10 ~ +40°C

COLORS & MATERIALS

Color (Housing)	White
Material (Housing)	Steel
Material (Reflector)	PC


CERTIFICATES & STANDARDS

Driver certificates	CE
Fixture certificates	CE
Ingress protection	IP20
Protection class	II
Protection class IK	02
Photobiological safety group EN62778	RG0
IEC	EN IEC 62722-2-1
LM80 (TM21) / L90B50 (hours)	>50,000

CAPABILITIES

UGR	≤16
Dimmable	No / DALI
LED Module replacable	No

DIMENSIONS

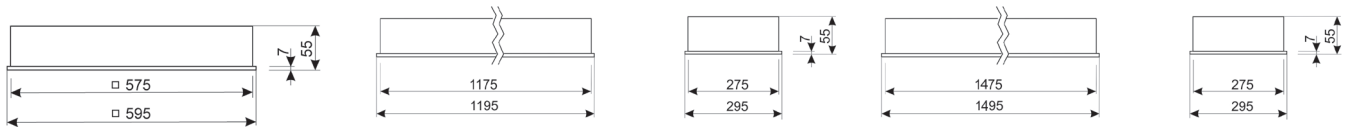

PRAGMALUX

All rights reserved. Pragmalux - PDL Lighting Group B.V. retains the right to modify product specifications without any prior notice or obligation and does not assume any liability for any consequences of using this document. Subject to errors and printing errors. Luminous flux tolerance: +/- 10%. Power consumption tolerance: +/- 10%.

Version: February 2021

