

STELLO LED PENDANT

PRAGMALUX
PROFESSIONAL LIGHTING

KEY FEATURES

Pendant round panel. Non-Dimmable Tridonic Driver, optional DALI Dimmable driver. PMMA Opal Diffuser. Pendant mounting set, cable length 1.5m (Included)



IP20 IK02   CRI ≥80

5 PRAGMALUX
YEAR
WARRANTY

OPTIONS



COLORS



ACCESSORIES




Pendel set 1.5m
Included

SPECIFICATIONS



ITEM CODE	DESCRIPTION	W	LM*	LM/W*	KELVIN	LIFETIME L80B10	BEAM ANGLE
9060539	LED Pendelarmatuur Stello Ø610mm 58W 3000K 5600lm White	58	5600	97	3000	50000	120°
9060544	LED Pendelarmatuur Stello Ø610mm 58W 3000K 5600lm White - DALI	58	5600	97	3000	50000	120°
9060540	LED Pendelarmatuur Stello Ø610mm 58W 4000K 6000lm White	58	6000	103	4000	50000	120°
9060545	LED Pendelarmatuur Stello Ø610mm 58W 4000K 6000lm White - DALI	58	6000	103	4000	50000	120°

* Bruto lumen - LOR up to 70%

DIMENSIONS

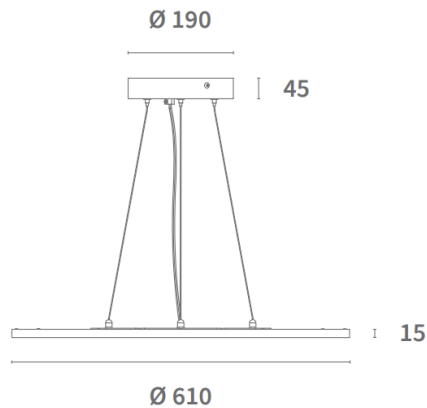

PHOTOMETRIC SPECIFICATIONS LED PENDANT STELLO 58W 3000K

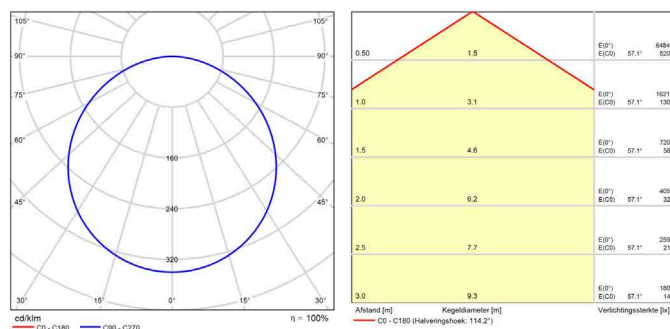

PRAGMALUX

All rights reserved. Pragmalux - PDL Lighting Group B.V. retains the right to modify product specifications without any prior notice or obligation and does not assume any liability for any consequences of using this document. Subject to errors and printing errors. Luminous flux tolerance: +/- 10%. Power consumption tolerance: +/- 10%.

Version: October 2020



874/2012