

ADJUSTO G2 LED SPOT



KEY FEATURES

Recessed spotlight that can be tilted 85 ° and rotated 350 °. It is the ideal spot to set beautiful accents in shops, galleries and showrooms. It can be used as basic light but also to illuminate shop windows, shelves and products. The recessed spot is available in different colors and light beams.

- CRI / Ra 90+
- Supplied including LED Driver + junction box (incl. Strain relief)
- Beam 36 °
- 85° - 355 ° tiltable and rotatable
- Available in 1-10V and DALI driver on request
- Other beam angles available on request

DETAILS



Reflector



5 PRAGMALUX
YEAR
WARRANTY

OPTIONS



COLORS



SPECIFICATIONS

ITEM CODE	DESCRIPTION	W	LM*	LM/W*	KELVIN	LIFETIME L80B10	BEAM ANGLE
92115097	LED Spot Adjusto G2 24W 3000K CRI>90 36D 3078lm Ø160 F - G Ø146 White	24	3078	128	3000	50000	36°
92115101	LED Spot Adjusto G2 24W 3000K CRI>90 36D 3078lm Ø160 F - G Ø146 Black	24	3078	128	3000	50000	36°
92115577	LED Spot Adjusto G2 24W 4000K CRI>90 PW 36D 3322lm Ø160 F - G Ø146 White	24	3078	128	4000	50000	36°
92115581	LED Spot Adjusto G2 24W 4000K CRI>90 PW 36D 3322lm Ø160 F - G Ø146 Black	24	3322	138	4000	50000	36°
92115913	LED Spot Adjusto G2 36W 3000K CRI>90 36D 4732lm Ø188 F - G Ø175 White	36	4732	131	3000	50000	36°
92115917	LED Spot Adjusto G2 36W 3000K CRI>90 36D 4732lm Ø188 F - G Ø175 Black	36	4732	131	3000	50000	36°
92116393	LED Spot Adjusto G2 36W 4000K CRI>90 PW 36D 5097lm Ø188 F - G Ø175 White	36	5097	142	4000	50000	36°
92116397	LED Spot Adjusto G2 36W 4000K CRI>90 PW 36D 5097lm Ø188 F - G Ø175 Black	36	5097	142	4000	50000	36°
9115137	LED Spot Adjusto G2 24W 3000K CRI>90 36D 3078lm Ø160 F - G Ø146 White Dali	24	3078	128	3000	50000	36°
9115141	LED Spot Adjusto G2 24W 3000K CRI>90 36D 3078lm Ø160 F - G Ø146 Black Dali	24	3078	128	3000	50000	36°
9115617	LED Spot Adjusto G2 24W 4000K CRI>90 PW 36D 3322lm Ø160 F - G Ø146 White Dali	24	3078	128	4000	50000	36°
9115621	LED Spot Adjusto G2 24W 4000K CRI>90 PW 36D 3322lm Ø160 F - G Ø146 Black Dali	24	3322	138	4000	50000	36°
9115953	LED Spot Adjusto G2 36W 3000K CRI>90 36D 4732lm Ø188 F - G Ø175 White Dali	36	4732	131	3000	50000	36°
9115957	LED Spot Adjusto G2 36W 3000K CRI>90 36D 4732lm Ø188 F - G Ø175 Black Dali	36	4732	131	3000	50000	36°
9116433	LED Spot Adjusto G2 36W 4000K CRI>90 PW 36D 5097lm Ø188 F - G Ø175 White Dali	36	5097	142	4000	50000	36°
9116437	LED Spot Adjusto G2 36W 4000K CRI>90 PW 36D 5097lm Ø188 F - G Ø175 Black Dali	36	5097	142	4000	50000	36°

* LED lumen - LOR up to 85%

ADJUSTO G2 LED SPOT

TECHNICAL DATA

ELECTRICAL DATA

Voltage (V)	220-240
Frequency (Hz)	50/60
Power factor (λ)	≥0.9
Operating mode	External LED Driver
Total harmonic distortion	≤ 20 %

TEMPERATURES & OPERATING CONDITIONS

Ambient temperature	25°C
---------------------	------

COLORS & MATERIALS

Color (Housing)	White/Black
Material (Housing)	Metal
Material (Reflector)	Metal


CERTIFICATES & STANDARDS

Driver certificates	CE
Fixture certificates	CE
Ingress protection	IP20
Protection class	III
Protection class IK	20
IEC	EN IEC 62722-2-1
LM80 (TM21) L90B50 (hours)	>50,000


CAPABILITIES

Dimmable	No / DALI
LED Module replacable	No

DIMENSIONS

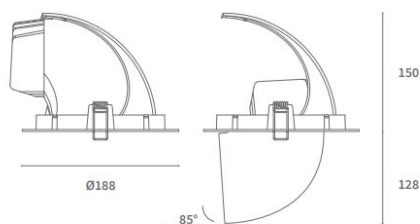

Cutout Size
Ø 175mm

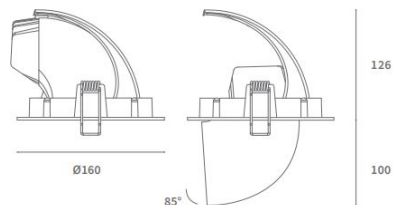

Cutout Size
Ø 146mm

PHOTOMETRIC SPECIFICATIONS

LED SPOT ADJUSTO G224W 3000K 36D 3322LM

