


ALPHA LED GU10 SPOT

PRAGMALUX
PROFESSIONAL LIGHTING

3 PRAGMALUX
YEAR
WARRANTY

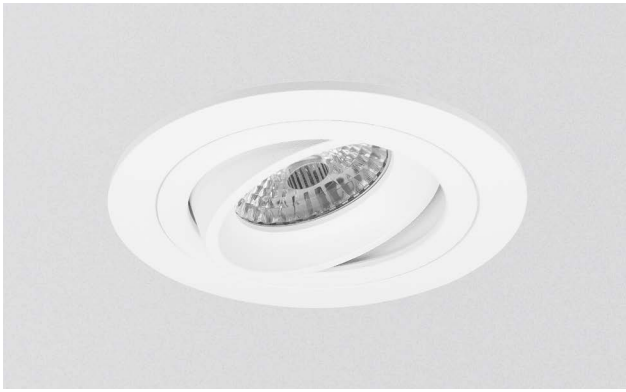

KEY FEATURES



- High quality recessed spot made of aluminum
- 360° rotatable and 40° tiltable
- Removable inner ring for easy installation
- Powder coating finish

IP20 IK02 GU10 220V
230V



DIMENSIONS

25 mm



COLORS



ACCESSORIES




IP65 Kit round
4608129



Blade clips
4607849

COMPATIBLE LAMPS



GU10 LED LED module

OPTIONS



SPECIFICATIONS

ITEM CODE	DESCRIPTION	EQUIVALENT	COLOR
4600161	Alpha MR16 Spot White Ø92mm Cutout Ø80mm 40° Tilttable (Incl. GU10 Fitting)	50W HAL	White
4600178	Alpha MR16 Spot Black Ø92mm Cutout Ø80mm 40° Tilttable (Incl. GU10 Fitting)	50W HAL	Black
4600154	Alpha MR16 Spot Aluminum Ø92mm Cutout Ø80mm 40° Tilttable (Incl. GU10 Fitting)	50W HAL	Brushed Alu
4600185	Alpha MR16 Spot Nickel Ø92mm Cutout Ø80mm 40° Tilttable (Incl. GU10 Fitting)	50W HAL	Nickel
4608266	Alpha MR16 Spot Gold Ø92mm Cutout Ø80mm 40° Tilttable (Incl. GU10 Fitting)	50W HAL	Gold
4604503	Alpha MR16 Spot Gold Ø92mm Cutout Ø80mm 40° Tilttable (Incl. GU10 Fitting)	50W HAL	Black/Gold

TECHNICAL DATA

ELECTRICAL DATA	
Voltage (V)	220-240
Frequency (Hz)	50/60
Max. Power (W)	50
Operating mode	GU10 fitting (included)
Electrical connection	2x 0.75mm ² wire
COLORS & MATERIALS	
Color (Housing)	White, Black, Aluminum, Nickel, Gold
Material (Housing)	Aluminum

CERTIFICATES & STANDARDS

Fixture certificates	CE
Ingress protection	IP20
Protection class IK	IK02

CAPABILITIES

Type of connection	GU10 with 18cm cable
Installation	40° Tilttable

PRAGMALUX

All rights reserved. Pragmalux - PDL Lighting Group B.V. retains the right to modify product specifications without any prior notice or obligation and does not assume any liability for any consequences of using this document. Subject to errors and printing errors. Luminous flux tolerance: +/- 10%. Power consumption tolerance: +/- 10%.

Version: March 2021

