



## KEY FEATURES

Gimball spot, the spot can be directed in any direction, without it protruding from the ceiling. This creates a calm image on the ceiling. The recessed spot can be tilted 30° and rotated 360°, which gives a great deal of flexibility to move the spot according to products, including rotating the spot.

IP20 IK03



CRI ≥ 90



TILTABLE  
30° X 360°

INSTALLATION  
195x205 mm  
370x205 mm  
540x205 mm

DIMENSIONS  
215x215 mm  
390x215 mm  
560x215 mm

**5** PRAGMALUX  
YEAR  
WARRANTY

## OPTIONS



2700K 4000K

## COLORS



## DETAILS




2 modules version



## ACCESSORIES

NEEDED COMBINATION: FRAME + MODULE



FRAME 1V  
White 9111050  
Black 9111051  
Grey 9111049




FRAME 2V  
White 9111053  
Black 9111054  
Grey 9111052

## SPECIFICATIONS

ITEM CODE	DESCRIPTION	W	LM	LM/W	KELVIN	LIFETIME L80B10	BEAM ANGLE
9112432	LED Spot Squadro LED Module Incl. Driver 46W 3000K CRI>90 PW 38D 4505lm Grey	46	5300	115	3000	50000	38°
9112436	LED Spot Squadro LED Module Incl. Driver 46W 3000K CRI>90 PW 38D 4505lm White	46	5300	115	3000	50000	38°
9112440	LED Spot Squadro LED Module Incl. Driver 46W 3000K CRI>90 PW 38D 4505lm Black	46	5300	115	3000	50000	38°
9112433	LED Spot Squadro LED Module Incl. Driver 46W 3000K CRI>90 PW 60D 4505lm Grey	46	5300	115	3000	50000	60°
9112437	LED Spot Squadro LED Module Incl. Driver 46W 3000K CRI>90 PW 60D 4505lm White	46	5300	115	3000	50000	60°
9112441	LED Spot Squadro LED Module Incl. Driver 46W 3000K CRI>90 PW 60D 4505lm Black	46	5300	115	3000	50000	60°

## DIMENSIONS




215 x 215



Cutout Size  
1-light  
205x195mm

157

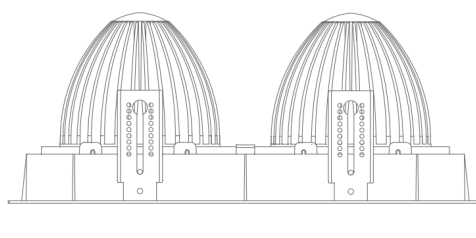

157

215 x 390



Cutout Size  
2-light  
205x370mm

