



KEY FEATURES

Round LED spot light for powerful general or accent lighting. Rotates through 350° and pivots through 80°. With high efficiency LED (max. 141lm/w). Faceted glossy 99,98% aluminium reflector with clear tempered glass diffuser. Very suitable as spot light in shops. Standard available in white (RAL 9003). Direct connection to 220-240VAC. Low maintenance and high life expectancy (50.000 hours L90B10). Colour stability, Mac Adam <3. Fast and easy mounting with springs. Five years warranty.

DETAILS



Back

IP40 IK02 CRI ≥ 80

OPTIONS: CRI90

2700K 5000K

SPECIFICATIONS

ITEM CODE	DESCRIPTION	W	LM	LM/W	KELVIN	LIFETIME L80B10	BEAM ANGLE
3501019	LED Spot Scopa 33W 3000K 20° White	33	4030	122	3000	50000	20°
3501001	LED Spot Scopa 33W 3000K 20° Black	33	4030	122	3000	50000	20°
3501021	LED Spot Scopa 33W 3000K 40° White	33	4280	130	3000	50000	40°
3501003	LED Spot Scopa 33W 3000K 40° Black	33	4280	130	3000	50000	40°
3501023	LED Spot Scopa 33W 3000K 60° White	33	3980	121	3000	50000	60°
3501005	LED Spot Scopa 33W 3000K 60° Black	33	3980	121	3000	50000	60°
3501020	LED Spot Scopa 33W 4000K 20° White	33	4240	128	4000	50000	20°
3501002	LED Spot Scopa 33W 4000K 20° Black	33	4240	128	4000	50000	20°
3501022	LED Spot Scopa 33W 4000K 40° White	33	4500	136	4000	50000	40°
3501004	LED Spot Scopa 33W 4000K 40° Black	33	4500	136	4000	50000	40°
3501024	LED Spot Scopa 33W 4000K 60° White	33	4185	127	4000	50000	60°
3501006	LED Spot Scopa 33W 4000K 60° Black	33	4185	127	4000	50000	60°
3501025	LED Spot Scopa 45W 3000K 20° White	45	5100	113	3000	50000	20°
3501007	LED Spot Scopa 45W 3000K 20° Black	45	5100	113	3000	50000	20°
3501027	LED Spot Scopa 45W 3000K 40° White	45	5420	120	3000	50000	40°
3501009	LED Spot Scopa 45W 3000K 40° Black	45	5420	120	3000	50000	40°
3501029	LED Spot Scopa 45W 3000K 60° White	45	5040	112	3000	50000	60°
3501011	LED Spot Scopa 45W 3000K 60° Black	45	5040	112	3000	50000	60°
3501026	LED Spot Scopa 45W 4000K 20° White	45	5380	120	4000	50000	20°
3501008	LED Spot Scopa 45W 4000K 20° Black	45	5380	120	4000	50000	20°
3501028	LED Spot Scopa 45W 4000K 40° White	45	5710	127	4000	50000	40°
3501010	LED Spot Scopa 45W 4000K 40° Black	45	5710	127	4000	50000	40°
3501030	LED Spot Scopa 45W 4000K 60° White	45	5315	118	4000	50000	60°
3501012	LED Spot Scopa 45W 4000K 60° Black	45	5315	118	4000	50000	60°
3501031	LED Spot Scopa 62W 3000K 20° White	62	6370	103	3000	50000	20°
3501013	LED Spot Scopa 62W 3000K 20° Black	62	6370	103	3000	50000	20°
3501033	LED Spot Scopa 62W 3000K 40° White	62	6760	109	3000	50000	40°
3501015	LED Spot Scopa 62W 3000K 40° Black	62	6760	109	3000	50000	40°

PRAGMALUX

All rights reserved. Pragmalux - PDL Lighting Group B.V. retains the right to modify product specifications without any prior notice or obligation and does not assume any liability for any consequences of using this document. Subject to errors and printing errors. Luminous flux tolerance: +/- 10%. Power consumption tolerance: +/- 10%.

ITEM CODE	DESCRIPTION	W	LM	LM/W	KELVIN	LIFETIME L80B10	BEAM ANGLE
3501035	LED Spot Scopa 62W 3000K 60° White	62	6290	101	3000	50000	60°
3501017	LED Spot Scopa 62W 3000K 60° Black	62	6290	101	3000	50000	60°
3501032	LED Spot Scopa 62W 4000K 20° White	62	6700	108	4000	50000	20°
3501014	LED Spot Scopa 62W 4000K 20° Black	62	6700	108	4000	50000	20°
3501034	LED Spot Scopa 62W 4000K 40° White	62	7115	115	4000	50000	40°
3501016	LED Spot Scopa 62W 4000K 40° Black	62	7115	115	4000	50000	40°
3501036	LED Spot Scopa 62W 4000K 60° White	62	6615	107	4000	50000	60°
3501018	LED Spot Scopa 62W 4000K 60° Black	62	6615	107	4000	50000	60°

TECHNICAL DATA

ELECTRICAL DATA

Voltage (V)	220-240
Frequency (Hz)	50/60
Power factor (λ)	≥0.95
Operating mode	External LED Driver

CERTIFICATES & STANDARDS

Driver certificates	CE
Fixture certificates	CE
Ingress protection	IP40
Protection class	II
Protection class IK	02

TEMPERATURES & OPERATING CONDITIONS

Ambient temperature	25°C
---------------------	------


CAPABILITIES

Dimmable	No / Yes
LED Module replacable	No



COLORS & MATERIALS

Color (Housing)	White / Black
Material (Housing)	Aluminum
Material (Reflector)	Aluminum

DIMENSIONS

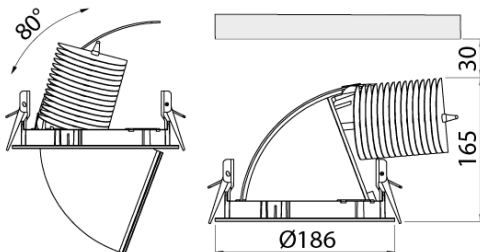

PHOTOMETRIC SPECIFICATIONS LED SPOT SCOPA 33W 3000K 40D

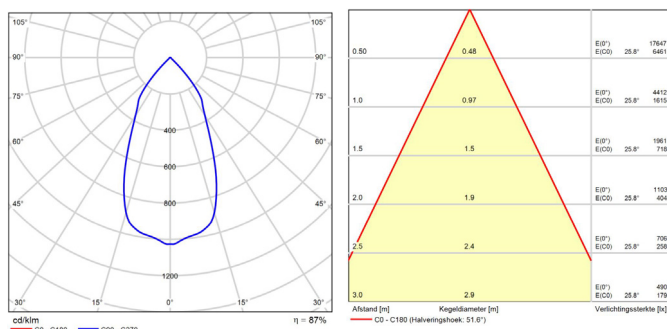

874/2012

PRAGMALUX

All rights reserved. Pragmalux - PDL Lighting Group B.V. retains the right to modify product specifications without any prior notice or obligation and does not assume any liability for any consequences of using this document. Subject to errors and printing errors. Luminous flux tolerance: +/- 10%. Power consumption tolerance: +/- 10%.

Version: January 2021