

LED WATERPROOF HOUSING



KEY FEATURES

- Luminaire housing, available for 1 or 2 T8 LED Tubes
- Cable gland suitable for 8-14mm installations
- Plug & Play installation
- Included stainless steel clips
- Available in 60cm – 150cm
- 5-year Warranty

APPLICATIONS



SPECIFICATIONS

Item code	Description	Beam angle (°)
4607535	LED Waterproof Housing IP65 60cm 1x18W	120
4607542	LED Waterproof Housing IP65 60cm 2x18W	120
4607559	LED Waterproof Housing IP65 120cm 1x36W	120
4607566	LED Waterproof Housing IP65 120cm 2x36W	120
4607573	LED Waterproof Housing IP65 150cm 1x58W	120
4607580	LED Waterproof Housing IP65 150cm 2x58W	120

TECHNICAL DATA

Electrical data	
Voltage (V)	220-240
Frequency (Hz)	50/60
Wiring Scheme	Max 3x2.5 mm ² wire Cable Gland Φ 8-14 mm

Certificates & standards	
Fixture certificates	CE
Ingress protection	IP65
Protection class	I
Protection class IK	08
Glow Wire Test (IEC 695-2-1)	850°C
Luminaire with limited surface temperature, class "D"	No

Temperatures & operating conditions

Ambient temperature	25°C
Operating temperature	-25 ~ +40°C
Storage temperature	-25 ~ +80°C

Colors & materials


Color (Housing)	Grey RAL7035
Material (Housing)	PC
Material (Diffuser)	PC
Color (Product)	Grey

Capabilities

Dimmable	No
Type of connection	Push Terminal, 3-pole
Holder designation	G13
Equipped with lamp	No

DIMENSIONS


LED Waterproof Housing IP65 60cm 1x18W




LED Waterproof Housing IP65 60cm 2x18W




LED Waterproof Housing IP65 120cm 1x36W




LED Waterproof Housing IP65 120cm 2x36W



LED Waterproof Housing IP65 150cm 1x58W



LED Waterproof Housing IP65 150cm 2x58W




PRAGMALUX

All rights reserved. Pragmalux - PDL Lighting Group B.V. retains the right to modify product specifications without any prior notice or obligation and does not assume any liability for any consequences of using this document. Subject to errors and printing errors. Luminous flux tolerance: +/- 10%. Power consumption tolerance: +/- 10%.

Version: April 2020

LED WATERPROOF HOUSING


PRODUCT DETAILS

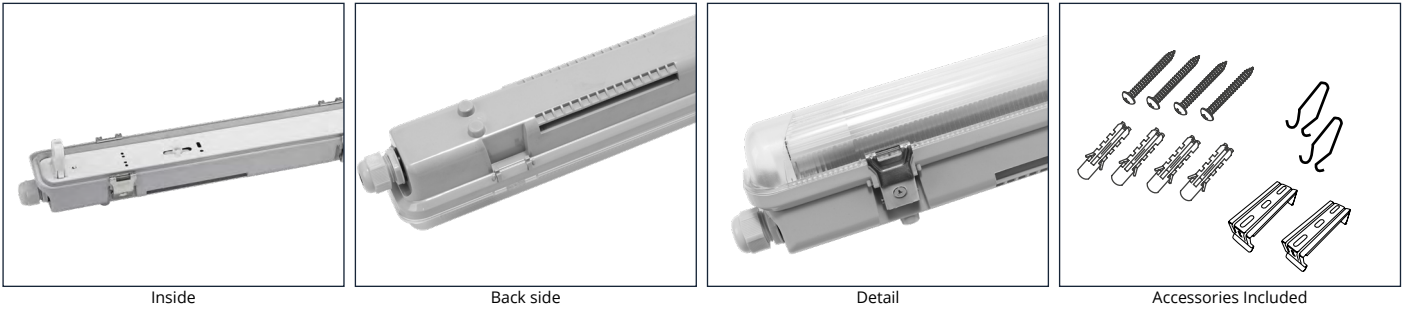

PACKAGING INFORMATION

Item code	Description	Net weight product (g)	Single box		Master carton		
			Dimensions (LxWxH) (mm)	Weight (g)	Units per master carton	Dimensions (LxWxH) (mm)	Weight (g)
4607535	LED Waterproof Housing IP65 60cm 1x18W	630	685X75X90	730	12	700X320X290	9500
4607542	LED Waterproof Housing IP65 60cm 2x18W	760	685X100X90	870	12	700X380X320	11500
4607559	LED Waterproof Housing IP65 120cm 1x36W	1100	1295X75X90	1310	12	1310X320X290	17000
4607566	LED Waterproof Housing IP65 120cm 2x36W	1350	1295X100X90	1650	9	1310X320X290	16000
4607573	LED Waterproof Housing IP65 150cm 1x58W	1300	1595X75X90	1550	9	1610X290X245	15000
4607580	LED Waterproof Housing IP65 150cm 2x58W	1700	1595X100X90	2030	9	1610X320X290	19500

APPLICATIONS

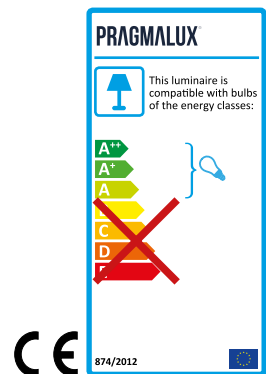

PRAGMALUX

All rights reserved. Pragmalux - PDL Lighting Group B.V. retains the right to modify product specifications without any prior notice or obligation and does not assume any liability for any consequences of using this document. Subject to errors and printing errors. Luminous flux tolerance: +/- 10%. Power consumption tolerance: +/- 10%.