

ALTO FLOOD LED 3-PHASE RAIL SPOT

PRAGMALUX
PROFESSIONAL LIGHTING



KEY FEATURES

Pragmalux LED 3-Phase Rail Spot Alto is a very compact track spot and ideal for use in shops and showrooms to attractively illuminate walls and products. The special feature is that the LED driver is integrated in the adapter giving a minimalist look. Ideal if there is a low ceiling height. This product comes with a premium Philips SLM LED module CRI > 90 and Philips Xitanium LED driver.



5 PRAGMALUX
YEAR
WARRANTY

OPTIONS



COLORS



DETAILS




Back

SPECIFICATIONS

| ITEM CODE | DESCRIPTION | W | LM* | LM/W* | KELVIN | LIFETIME L80B10 | BEAM ANGLE |
|-----------|---|----|------|-------|--------|-----------------|------------|
| 9172683 | LED 3-Phase Rail Spot Alto 24W 3000K CRI>80 15D 3911lm White | 24 | 3911 | 163 | 3000 | 50000 | 15° |
| 9172684 | LED 3-Phase Rail Spot Alto 24W 3000K CRI>80 24D 3911lm White | 24 | 3911 | 163 | 3000 | 50000 | 24° |
| 9172685 | LED 3-Phase Rail Spot Alto 24W 3000K CRI>80 36D 3911lm White | 24 | 3911 | 163 | 3000 | 50000 | 36° |
| 9172719 | LED 3-Phase Rail Spot Alto 24W 3000K CRI>90 15D 3976lm White | 24 | 3976 | 166 | 3000 | 50000 | 15° |
| 9172720 | LED 3-Phase Rail Spot Alto 24W 3000K CRI>90 24D 3976lm White | 24 | 3976 | 166 | 3000 | 50000 | 24° |
| 9172721 | LED 3-Phase Rail Spot Alto 24W 3000K CRI>90 36D 3976lm White | 24 | 3976 | 166 | 3000 | 50000 | 36° |
| 9172722 | LED 3-Phase Rail Spot Alto 24W 3000K CRI>90 60D 3976lm White | 24 | 3976 | 166 | 3000 | 50000 | 60° |
| 9172745 | LED 3-Phase Rail Spot Alto 24W 3000K CRI>90 PW 36D 3495lm White | 24 | 3495 | 146 | 3000 | 50000 | 36° |
| 9172757 | LED 3-Phase Rail Spot Alto 24W 4000K CRI>90 PW 36D 3495lm White | 24 | 3495 | 146 | 4000 | 50000 | 36° |
| 9172761 | LED 3-Phase Rail Spot Alto 24W 4000K CRI>90 PW 36D 3495lm Black | 24 | 3495 | 146 | 4000 | 50000 | 36° |
| 9172758 | LED 3-Phase Rail Spot Alto 24W 4000K CRI>90 PW 60D 3495lm White | 24 | 3495 | 146 | 4000 | 50000 | 60° |
| 9172762 | LED 3-Phase Rail Spot Alto 24W 4000K CRI>90 PW 60D 3495lm Black | 24 | 3495 | 146 | 4000 | 50000 | 60° |

* Bruto lumen - LOR up to 85%

DIMENSIONS

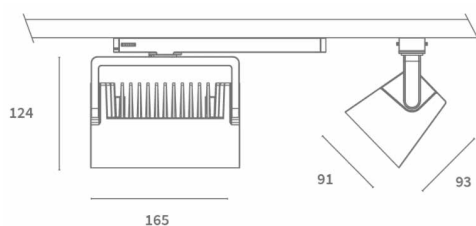

PRAGMALUX

All rights reserved. Pragmalux - PDL Lighting Group B.V. retains the right to modify product specifications without any prior notice or obligation and does not assume any liability for any consequences of using this document. Subject to errors and printing errors. Luminous flux tolerance: +/- 10%. Power consumption tolerance: +/- 10%.

Version: October 2020

