

PICCOLO LED 3-PHASE RAIL SPOT



KEY FEATURES

Pragmalux LED 3-Phase Railspot Piccolo is a special 3-Phase Railspot. Minimalist in size, yet powerful and extremely suitable for setting beautiful accents. These spots fit on all universal 3-Phase Rails, giving maximum flexibility. The Piccolo series has a high color rendering of CRI90 + as standard, so the colors are displayed perfectly. On request it can be supplied with different degree beams (15° / 24° / 50°). Thanks to the maximum flexibility and light image, the Piccolo series is very suitable for retail and office applications.

IP20 IK02    CRI ≥ 90 

5 PRAGMALUX
YEAR
WARRANTY

OPTIONS



COLORS



DETAILS



Black version



Grey version

ACCESSORIES



Ring

SPECIFICATIONS

ITEM CODE	DESCRIPTION	W	LM*	LM/W*	KELVIN	LIFETIME L80B10	BEAM ANGLE
9171853	LED 3-Phase Rail Spot Piccolo 15W 2700K CRI>90 33D 1393lm Grey - Dimmable	15	1393	93	2700	50000	33°
9171856	LED 3-Phase Rail Spot Piccolo 15W 2700K CRI>90 33D 1393lm White - Dimmable	15	1393	93	2700	50000	33°
9171859	LED 3-Phase Rail Spot Piccolo 15W 2700K CRI>90 33D 1393lm Black - Dimmable	15	1393	93	2700	50000	33°
9171854	LED 3-Phase Rail Spot Piccolo 15W 3000K CRI>90 33D 1440lm Grey - Dimmable	15	1440	96	3000	50000	33°
9171857	LED 3-Phase Rail Spot Piccolo 15W 3000K CRI>90 33D 1440lm White - Dimmable	15	1440	96	3000	50000	33°
9171860	LED 3-Phase Rail Spot Piccolo 15W 3000K CRI>90 33D 1440lm Black - Dimmable	15	1440	96	3000	50000	33°
9171855	LED 3-Phase Rail Spot Piccolo 15W 4000K CRI>90 33D 1561lm Grey - Dimmable	15	1561	104	4000	50000	33°
9171858	LED 3-Phase Rail Spot Piccolo 15W 4000K CRI>90 33D 1561lm White - Dimmable	15	1561	104	4000	50000	33°
9171861	LED 3-Phase Rail Spot Piccolo 15W 4000K CRI>90 33D 1561lm Black - Dimmable	15	1561	104	4000	50000	33°
9171862	LED 3-Phase Rail Spot Piccolo 27W 2700K CRI>90 40D 2786lm Grey - Dimmable	27	2786	103	2700	50000	40°
9171865	LED 3-Phase Rail Spot Piccolo 27W 2700K CRI>90 40D 2786lm White - Dimmable	27	2786	103	2700	50000	40°
9171868	LED 3-Phase Rail Spot Piccolo 27W 2700K CRI>90 40D 2786lm Black - Dimmable	27	2786	103	2700	50000	40°
9171863	LED 3-Phase Rail Spot Piccolo 27W 3000K CRI>90 40D 2902lm Grey - Dimmable	27	2902	107	3000	50000	40°
9171866	LED 3-Phase Rail Spot Piccolo 27W 3000K CRI>90 40D 2902lm White - Dimmable	27	2902	107	3000	50000	40°
9171869	LED 3-Phase Rail Spot Piccolo 27W 3000K CRI>90 40D 2902lm Black - Dimmable	27	2902	107	3000	50000	40°
9171864	LED 3-Phase Rail Spot Piccolo 27W 4000K CRI>90 40D 3121lm Grey - Dimmable	27	3121	116	4000	50000	40°
9171867	LED 3-Phase Rail Spot Piccolo 27W 4000K CRI>90 40D 3121lm White - Dimmable	27	3121	116	4000	50000	40°
9171870	LED 3-Phase Rail Spot Piccolo 27W 4000K CRI>90 40D 3121lm Black - Dimmable	27	3121	116	4000	50000	40°
9171844	LED 3-Phase Rail Spot Piccolo 7W 2700K CRI>90 33D 674lm Grey - Dimmable	7	674	96	2700	50000	33°
9171847	LED 3-Phase Rail Spot Piccolo 7W 2700K CRI>90 33D 674lm White - Dimmable	7	674	96	2700	50000	33°
9171850	LED 3-Phase Rail Spot Piccolo 7W 2700K CRI>90 33D 674lm Black - Dimmable	7	674	96	2700	50000	33°
9171845	LED 3-Phase Rail Spot Piccolo 7W 3000K CRI>90 33D 722lm Grey - Dimmable	7	722	103	3000	50000	33°
9171848	LED 3-Phase Rail Spot Piccolo 7W 3000K CRI>90 33D 722lm White - Dimmable	7	722	103	3000	50000	33°
9171851	LED 3-Phase Rail Spot Piccolo 7W 3000K CRI>90 33D 722lm Black - Dimmable	7	722	103	3000	50000	33°
9171846	LED 3-Phase Rail Spot Piccolo 7W 4000K CRI>90 33D 775lm Grey - Dimmable	7	775	111	4000	50000	33°
9171849	LED 3-Phase Rail Spot Piccolo 7W 4000K CRI>90 33D 775lm White - Dimmable	7	775	111	4000	50000	33°
9171852	LED 3-Phase Rail Spot Piccolo 7W 4000K CRI>90 33D 775lm Black - Dimmable	7	775	111	4000	50000	33°




* Bruto lumen - LOR up to 85%

PRAGMALUX

All rights reserved. Pragmalux - PDL Lighting Group B.V. retains the right to modify product specifications without any prior notice or obligation and does not assume any liability for any consequences of using this document. Subject to errors and printing errors. Luminous flux tolerance: +/- 10%. Power consumption tolerance: +/- 10%.

Version: October 2020

DIMENSIONS

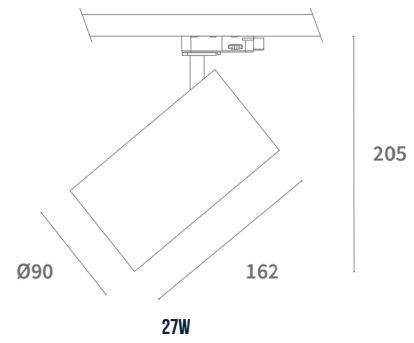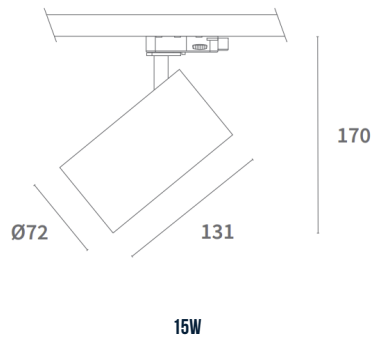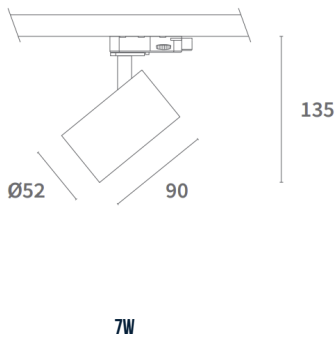

PHOTOMETRIC SPECIFICATIONS LED 3 PHASE RAIL PICCOLO 7W 3000K 33D

