



## KEY FEATURES

- Professional batten fixture with slim design including Through-wiring 3x2,5mm<sup>2</sup>
- Included Premium Philips 4-in-1 Multi-Watt Driver. Adjustable lumen output
- Selectable CCT (3000-4000-5000K) Dipswitch
- Integrated LED with a long lifespan of L80B10 76,000 hours / L90B50 50,000 hours
- Available in 4 sizes: 60/90/120/150cm
- Easy linkable
- Electrical installation from both sides and the back
- Supplied with mounting brackets, suspension kit available under request
- 5 year Pragmalux Warranty

IP20 IK04  650° GWT 140 LM/W  THROUGH-WIRING 3X2.5MM<sup>2</sup>  120°

**5** PRAGMALUX  
YEAR  
WARRANTY

## DETAILS



CCT Switch

## OPTIONS



## SPECIFICATIONS (ACCORDING TO EN IEC 62722-2-1)

ITEM CODE	DESCRIPTION	W	LM	LM/W	KELVIN	CRI	INPUT CURRENT	LIFETIME L90B50	BEAM ANGLE
1092600	LED Batten 60cm 11-20W 3000K-5000K 3-CCT 1430-2600lm	11-20	1430-2600	130	3000-5000	≥80	0.07-0.11	>50000	120°
1111710	LED Batten 90cm 15-25W 3000K-5000K 3-CCT 2100-3500lm	15-25	2100-3500	140	3000-5000	≥80	0.09-0.14	>50000	120°
1111880	LED Batten 90cm 15-25W 3000K-5000K 3-CCT 2100-3500lm - Emergency 3H	15-25	2100-3500	140	3000-5000	≥80	0.09-0.14	>50000	120°
1092770	LED Batten 120cm 20-35W 3000K-5000K 3-CCT 2800-4900lm	20-35	2800-4900	140	3000-5000	≥80	0.13-0.20	>50000	120°
1093070	LED Batten 120cm 20-35W 3000K-5000K 3-CCT 2800-4900lm - Emergency 3H	20-35	2800-4900	140	3000-5000	≥80	0.13-0.20	>50000	120°
1092840	LED Batten 150cm 27-50W 3000K-5000K 3-CCT 3780-7000lm	27-50	3780-7000	140	3000-5000	≥80	0.18-0.28	>50000	120°
1093140	LED Batten 150cm 27-50W 3000K-5000K 3-CCT 3780-7000lm - Emergency 3H	27-50	3780-7000	140	3000-5000	≥80	0.18-0.28	>50000	120°

## TECHNICAL DATA

ELECTRICAL DATA	
Voltage (V)	220-240
Frequency (Hz)	50/60
Power factor (λ)	≥0.95
Operating mode	Integrated LED Driver
Electrical connection	Max 3x2,5 mm <sup>2</sup> wire
Total harmonic distortion	≤ 20 %

## TEMPERATURES & OPERATING CONDITIONS

Ambient temperature	25°C
---------------------	------

## COLORS & MATERIALS

Color ( Housing)	White
Material ( Housing)	Aluminium
Material ( Reflector)	PC

## CERTIFICATES & STANDARDS

Driver certificates	CE
Fixture certificates	CE
Ingress protection	IP20
Protection class	I
Protection class IK	04
Glow Wire Test ( IEC 695-2-1)	650°C
IEC	EN IEC 62722-2-1
LM80 (TM21) L90B50 (hours)	>50,000

## CAPABILITIES

UGR	≤25
Dimmable	No
Type of connection	Push Terminal, 3-pole
LED Module replacable	No
Installation	Through-wiring possible


## PRAGMALUX

All rights reserved. Pragmalux - PDL Lighting Group B.V. retains the right to modify product specifications without any prior notice or obligation and does not assume any liability for any consequences of using this document. Subject to errors and printing errors. Luminous flux tolerance: +/- 10%. Power consumption tolerance: +/- 10%.


Version: June 2021

ITEM CODE	DESCRIPTION	MAX. NO. OF DRIVERS ON MCB TYPE B 10A	MAX. NO. OF DRIVERS ON MCB TYPE B 16A	MAX. NO. OF DRIVERS ON MCB TYPE C 10A	MAX. NO. OF DRIVERS ON MCB TYPE C 16A
1092600	LED Batten 60cm 11-20W 3000K-5000K 3-CCT 1430-2600lm	50	80	84	108
1092770	LED Batten 120cm 20-35W 3000K-5000K 3-CCT 2800-4900lm	28	16	47	78
1093070	LED Batten 120cm 20-35W 3000K-5000K 3-CCT 2800-4900lm - Emergency 3H	28	16	47	78
1092840	LED Batten 150cm 27-50W 3000K-5000K 3-CCT 3780-7000lm	19	31	32	52
1093140	LED Batten 150cm 27-50W 3000K-5000K 3-CCT 3780-7000lm - Emergency 3H	19	31	32	52

## DIMENSIONS

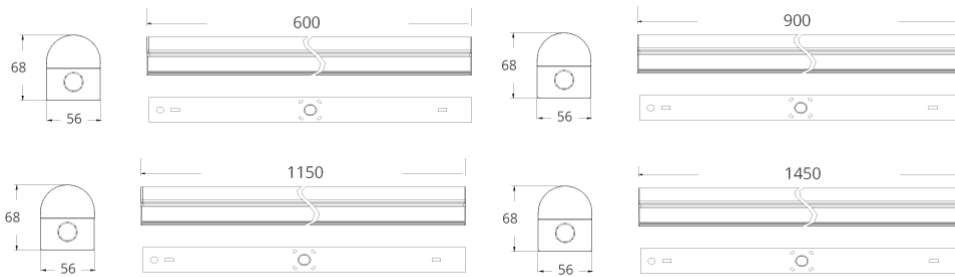

## PHOTOMETRIC SPECIFICATIONS LED BATTEN 120CM 35W 5000K 3500LM

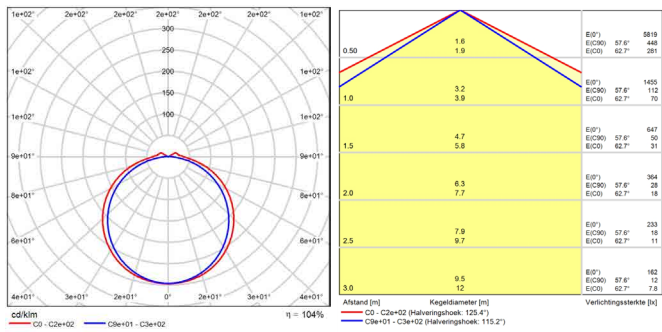

## EXTRA INFORMATION

