

MADO PENDANT LED DOWNLIGHT



KEY FEATURES

LED downlight Powerful round LED pendant. High gloss aluminium reflector (99,9%) with matt (M) finish (UGR<18). Extra wide beam angle (>74,0°) and high efficiency (max 123lm/w) with CRI>80. Satinated PS Microprism diffuser for high comfort. White painted steel body (RAL9003). Direct connection to mains. Trumpet shaped darklight reflector made of 99,98% specular aluminium with wide beam angle (>79°) with high efficiency (max 142lm/w) and CRI>80. Very low glare (UGR<20) and minimal brightness due to unique darklight reflector design. High gloss aluminum reflector (99,9%) with decorative cross louvre and wide beam angle (>93,0°) and low glare (UGR<17) with high efficiency (max 119lm/w). Satinated PS Microprism diffuser for high comfort, CRI>80. Very suitable as general lighting in hallways, offices, high rooms like lobby's, churches and mosques. Including 3 meter cable and steel wires (3x) Low maintenance and high life expectancy. Colour stability, Mac Adam <3. Fast and easy mounting. Five years warranty.


IP40 IK02 ∇ ∇ ∇ ∇ ∇ CRI ≥ 80

5 PRAGMALUX
YEAR
WARRANTY

DETAILS



Reflector - Matt



Reflector - Cross

OPTIONS



CRI > 90



2700K 5000K

COLORS



SPECIFICATIONS


ITEM CODE	DESCRIPTION	W	LM	LM/W	KELVIN	LIFETIME L80B10	BEAM ANGLE
3501339	LED Pendel Downlight Mado 205 Darklight 12W 4000K 1869lm Ø205 B - H Ø190	12	1869	156	4000	50000	77°
3501377	LED Pendel Downlight Mado 205 Darklight 18W 3000K 2486lm Ø205 B - H Ø190	18	2486	138	3000	50000	77°
3501350	LED Pendel Downlight Mado 205 Darklight 25W 3000K 3395lm Ø205 B - H Ø190	25	3395	136	3000	50000	77°
3501362	LED Pendel Downlight Mado 205 Darklight 25W 4000K 3566lm Ø205 B - H Ø190	25	3566	143	4000	50000	77°
3501338	LED Pendel Downlight Mado 205 Cross rooster 12W 4000K Ø205 B - H Ø190	12	1535	128	4000	50000	93°
3501376	LED Pendel Downlight Mado 205 Cross rooster 18W 3000K Ø205 B - H Ø190	18	2000	111	3000	50000	93°
3501349	LED Pendel Downlight Mado 205 Cross rooster 25W 3000K Ø205 B - H Ø190	25	2695	108	3000	50000	93°
3501361	LED Pendel Downlight Mado 205 Cross rooster 25W 4000K Ø205 B - H Ø190	25	2835	113	4000	50000	93°
3501331	LED Pendel Downlight Mado 205 Mat IP40 12W 3000K 1545lm Ø205 B - H Ø190 UGR<18	12	1545	129	1545	50000	84°
3501340	LED Pendel Downlight Mado 205 Mat IP40 12W 4000K 1625lm Ø205 B - H Ø190 UGR<18	12	1625	135	1625	50000	84°
3501351	LED Pendel Downlight Mado 205 Mat IP40 25W 3000K 2950lm Ø205 B - H Ø190 UGR<18	25	2950	118	2950	50000	84°
3501363	LED Pendel Downlight Mado 205 Mat IP40 25W 4000K 3100lm Ø205 B - H Ø190 UGR<18	25	3100	124	3100	50000	84°

EXTRA INFORMATION



Reflector - Darklight

PHOTOMETRIC SPECIFICATIONS LED DOWNLIGHT MADO 240 25W 3000K MATT

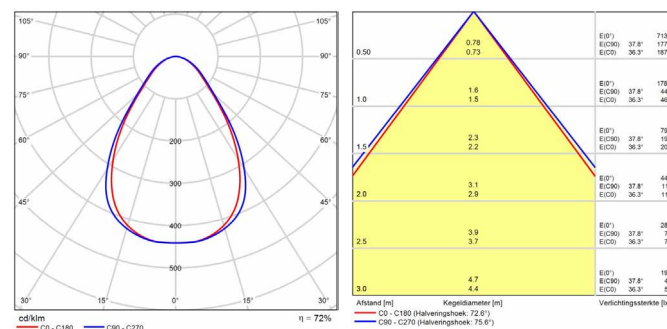

DIMENSIONS

