



## KEY FEATURES

- Dust-free accumulation design with better heat dissipation
- Luminaires are suitable for 3 to 14 meters high
- Long life of 76,000 hours
- Plug & Play installation 3-pole IP68 screwless connector
- Up to 180 lumens per watt
- Standard 1-10V Dimmable
- Excellent luminaire for heavy dust area
- 5 years Pragmalux warranty

## DETAILS



Microwave sensor

IP65 IK10 650° GWT 180LM/W

## OPTIONS



**5** PRAGMALUX  
YEAR  
WARRANTY

**7** PRAGMALUX  
YEAR  
WARRANTY  
EXTENDED-PRO

## ACCESSORIES



Reflector Alu  
4605180

Prisma reflector  
4605173

Microwave sensor  
4605159

Remote control  
4605166

IP68 connector  
included

## SPECIFICATIONS

ITEM CODE	DESCRIPTION	W	LM	LM/W	KELVIN	CRI	INPUT CURRENT	LIFETIME L80B10	EQUIVALENT	BEAM ANGLE
4605197	LED Highbay Ultra 100W 4000K 90° 1-10V Dim Black	100	18000	180	4000	≥80	0.46	76000	200W	90°
4605203	LED Highbay Ultra 120W 4000K 90° 1-10V Dim Black	120	21600	180	4000	≥80	0.55	76000	250W	90°
4605210	LED Highbay Ultra 150W 4000K 90° 1-10V Dim Black	150	27000	180	4000	≥80	0.69	76000	250W	90°
4605227	LED Highbay Ultra 200W 4000K 90° 1-10V Dim Black	200	36000	180	4000	≥80	0.91	76000	400W	90°

## TECHNICAL DATA

ELECTRICAL DATA	
Voltage (V)	220-240
Frequency (Hz)	50/60
Power factor (λ)	≥0.9
Operating mode	Integrated LED Driver
Electrical connection	Max 3x1,5 mm <sup>2</sup> wire
Total harmonic distortion	≤ 15 %

TEMPERATURES & OPERATING CONDITIONS	
Ambient temperature	25°C
Operating temperature	-40 ~ +50°C
Storage temperature	-40 ~ +85°C

COLORS & MATERIALS	
Color ( Housing)	Black RAL9017
Material ( Housing)	Aluminum
Material ( Reflector)	PC


ITEM CODE	DESCRIPTION	DRIVER FAILURE RATE AT 5,000H	INRUSH CURRENT IPEAK (A)	INRUSH CURRENT TWIDTH (μs)	MAX. NO. OF DRIVERS ON MCB TYPE B 10A	MAX. NO. OF DRIVERS ON MCB TYPE B 16A	MAX. NO. OF DRIVERS ON MCB TYPE C 10A	MAX. NO. OF DRIVERS ON MCB TYPE C 16A
4605197	LED Highbay Ultra 100W 4000K 90° 1-10V Dim Black	≤1%	57	760	3	4	5	8
4605203	LED Highbay Ultra 120W 4000K 90° 1-10V Dim Black	≤1%	49	652	3	4	5	8
4605210	LED Highbay Ultra 150W 4000K 90° 1-10V Dim Black	≤1%	80	912	2	4	4	7
4605227	LED Highbay Ultra 200W 4000K 90° 1-10V Dim Black	≤1%	79.5	904	1	2	2	3

## PRAGMALUX

All rights reserved. Pragmalux - PDL Lighting Group B.V. retains the right to modify product specifications without any prior notice or obligation and does not assume any liability for any consequences of using this document. Subject to errors and printing errors. Luminous flux tolerance: +/- 10%. Power consumption tolerance: +/- 10%.


Version: October 2020

## DIMENSIONS

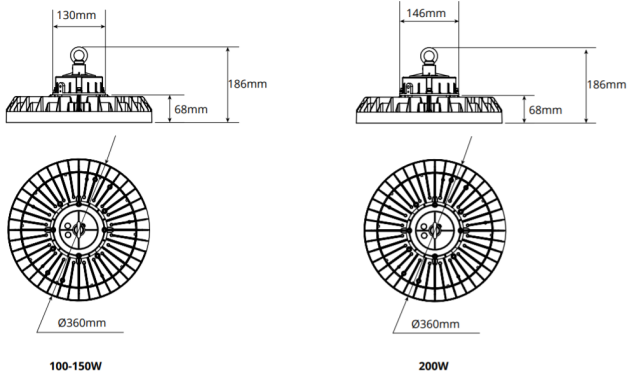


## PHOTOMETRIC SPECIFICATIONS


### LED HIGHBAY ULTRA 100W 4000K 90° 1-10V DIM BLACK

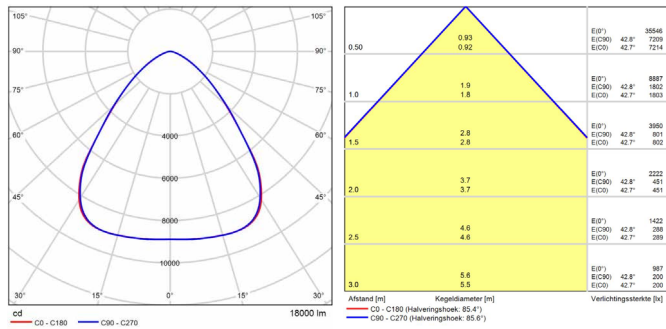

### LED HIGHBAY ULTRA 120W 4000K 90° 1-10V DIM BLACK

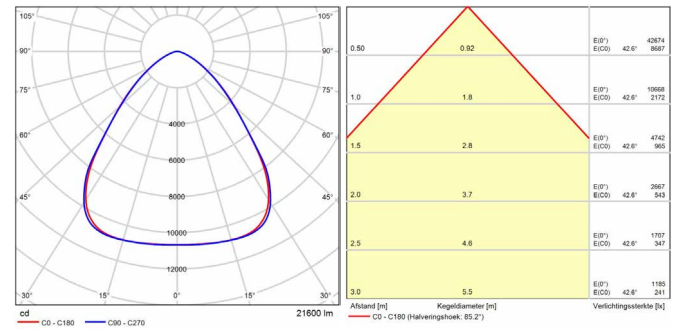

### LED HIGHBAY ULTRA 150W 4000K 90° 1-10V DIM BLACK

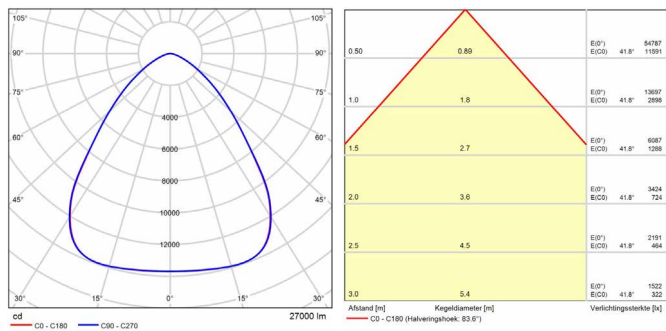

### LED HIGHBAY ULTRA 200W 4000K 90° 1-10V DIM BLACK

