

## KEY FEATURES

Recessed spotlight that can be tilted 50° and rotated 350°. It is the ideal spot to set beautiful accents in shops, galleries and showrooms. It can be used as basic light but also to illuminate shop windows, shelves and products. The recessed spot is available in different colors and light beams.



## DETAILS



Reflector



Side

IP20 IK02  $\triangle$  36° CRI  $\geq$  80 TILTABLE 350°-50° INSTALLATION 190 mm 154 mm DIMENSIONS 205 mm 168 mm

**5** PRAGMALUX  
YEAR  
WARRANTY

## OPTIONS

$\triangle$  15°  $\triangle$  24°  $\triangle$  60°

**2700K 4000K**

## COLORS




## SPECIFICATIONS

ITEM CODE	DESCRIPTION	W	LM*	LM/W*	KELVIN	LIFETIME L80B10	BEAM ANGLE
9111714	LED Spot Adjusto 24W 3000K CRI>80 36D 3700lm Grey Ø205 F - G Ø190	24	3700	154	3000	50000	36°
9111715	LED Spot Adjusto 24W 3000K CRI>80 36D 3700lm White Ø205 F - G Ø190	24	3700	154	3000	50000	36°
9111716	LED Spot Adjusto 24W 3000K CRI>80 36D 3700lm Black Ø205 F - G Ø190	24	3700	154	3000	50000	36°
9110978	LED Spot Adjusto 26W 3000K CRI>80 36D 3700lm White Ø168 F - G Ø154	26	3700	142	3000	50000	36°
9111718	LED Spot Adjusto 32W 4000K CRI>80 36D 3850lm White Ø205 F - G Ø190	32	3850	120	3000	50000	36°
9111720	LED Spot Adjusto 42W 3000K CRI>80 36D 6050lm Grey Ø205 F - G Ø190	42	6050	144	3000	50000	36°
9111721	LED Spot Adjusto 42W 3000K CRI>80 36D 6050lm White Ø205 F - G Ø190	42	6050	144	3000	50000	36°
9111722	LED Spot Adjusto 42W 3000K CRI>80 36D 6050lm Black Ø205 F - G Ø190	42	6050	144	3000	50000	36°

\* Bruto lumen - LOR up to 85%


## DIMENSIONS

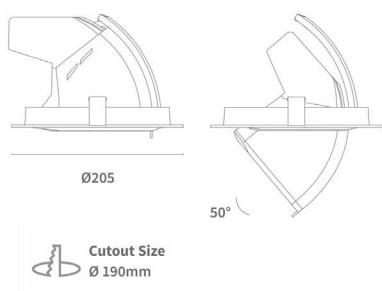

Ø205

50°

Cutout Size  
Ø 190mm

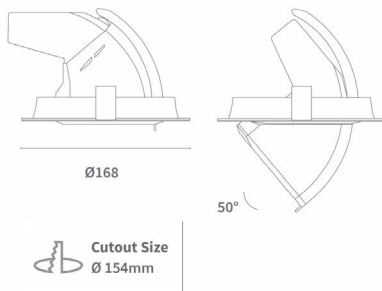

Ø168

50°

Cutout Size  
Ø 154mm

## PHOTOMETRIC SPECIFICATIONS

### LED SPOT ADJUSTO 42W 3000K 36D 6050LM

