


KEY FEATURES

Gimball spot, the spot can be directed in any direction, without it protruding from the ceiling. This creates a calm image on the ceiling. The recessed spot can be tilted 30° and rotated 360°, which gives a great deal of flexibility to move the spot according to products, including rotating the spot.



IP20 IK02

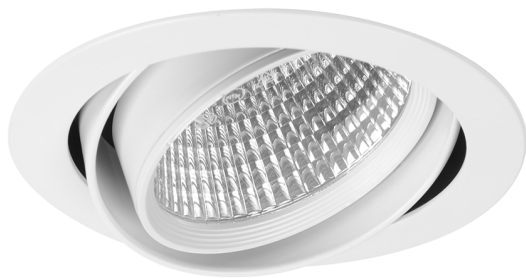

42°

CRI ≥ 90



TILTABLE
30° X 360°

INSTALLATION
175 mm

DIMENSIONS
190 mm

5 PRAGMALUX
YEAR
WARRANTY

OPTIONS



GST
18i3/5

CASAMBI

2700K 4000K

COLORS




SPECIFICATIONS

ITEM CODE	DESCRIPTION	W	LM*	LM/W*	KELVIN	LIFETIME L80B10	BEAM ANGLE
9112154	LED Spot Cardano 24W 3000K CRI>90 42D 3078lm White Ø190 F - G Ø175	24	3078	128	3000	50000	42°
9111702	LED Spot Cardano 41,6W 3000K CRI>90 42D 5308lm White Ø190 F - G Ø175	42	5308	126	3000	50000	42°
9114885	LED Spot Cardano 41,6W 3000K CRI>90 60D 5308lm White Ø190 F - G Ø175	42	5308	126	3000	50000	60°

* Bruto lumen - LOR up to 85%

DIMENSIONS

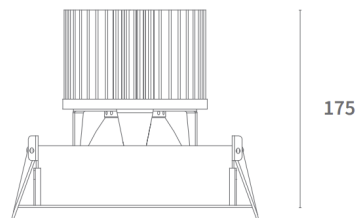

Ø190

175



Cutout Size
Ø 175mm

PHOTOMETRIC SPECIFICATIONS LED SPOT CARDANO 42W 3000K 42D

