



KEY FEATURES

Gimball spot, the spot can be directed in any direction, without it protruding from the ceiling. This creates a calm image on the ceiling. The recessed spot can be tilted 30° and rotated 360°, which gives a great deal of flexibility to move the spot according to products, including rotating the spot.

IP20 IK03



CRI ≥ 90



TILTABLE
30° X 360°

INSTALLATION
195x205 mm
370x205 mm
540x205 mm

DIMENSIONS
215x215 mm
390x215 mm
560x215 mm

5 PRAGMALUX
YEAR
WARRANTY

OPTIONS



2700K 4000K

COLORS



DETAILS




2 modules version




ACCESSORIES

NEEDED COMBINATION: FRAME + MODULE



FRAME 1V
White 9111050
Black 9111051
Grey 9111049




FRAME 2V
White 9111053
Black 9111054
Grey 9111052

SPECIFICATIONS

ITEM CODE	DESCRIPTION	W	LM*	LM/W*	KELVIN	LIFETIME L80B10	BEAM ANGLE
9111297	LED Spot Squadro LED Module Incl. Driver 26W 3000K CRI>80 38D 3700lm White	26	3700	142	3000	50000	38°
9112432	LED Spot Squadro LED Module Incl. Driver 42W 3000K CRI>90 PW 38D 5300lm Grey	42	5300	126	3000	50000	38°
9112436	LED Spot Squadro LED Module Incl. Driver 42W 3000K CRI>90 PW 38D 5300lm White	42	5300	126	3000	50000	38°
9112440	LED Spot Squadro LED Module Incl. Driver 42W 3000K CRI>90 PW 38D 5300lm Black	42	5300	126	3000	50000	38°
9112433	LED Spot Squadro LED Module Incl. Driver 42W 3000K CRI>90 PW 60D 5300lm Grey	42	5300	126	3000	50000	60°
9112437	LED Spot Squadro LED Module Incl. Driver 42W 3000K CRI>90 PW 60D 5300lm White	42	5300	126	3000	50000	60°
9112441	LED Spot Squadro LED Module Incl. Driver 42W 3000K CRI>90 PW 60D 5300lm Black	42	5300	126	3000	50000	60°

* Bruto lumen - LOR up to 85%


DIMENSIONS



215 x 215



Cutout Size
1-light
205x195mm

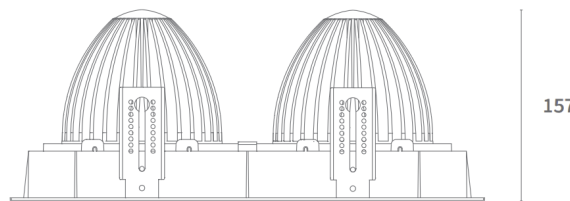

215 x 390



Cutout Size
2-light
205x370mm

