

CUBO LED SPOT SURFACE

PRAGMALUX
PROFESSIONAL LIGHTING



KEY FEATURES

Pragmalux LED Surface-mounted spotlight Cubo is a surface-mounted spot with integrated LED module with only 10 cm installation height. Available in 1 and 2 modules version and in the colors white and black. The light source is recessed in the fixture and therefore gives a low glare.

IP20 IK03



CRI ≥ 90



DIMMABLE

5 PRAGMALUX
YEAR
WARRANTY

COLORS

W

B

DETAILS



2 modules version



Black version

ACCESSORIES




Reflectors

SPECIFICATIONS

ITEM CODE	DESCRIPTION	W	LM*	LM/W*	KELVIN	LIFETIME L80B10	BEAM ANGLE
9172440	LED Surface Spot Cubo 1V 15,5W 2700K CRI>90 36D 810lm Black/Black Ø91x91 F - H Ø100 - Dimmable	15,5	810	52	2700	50000	36°
9172439	LED Surface Spot Cubo 1V 15,5W 2700K CRI>90 36D 977lm White/White Ø91x91 F - H Ø100 - Dimmable	15,5	977	63	2700	50000	36°
9172441	LED Surface Spot Cubo 1V 15,5W 3000K CRI>90 36D 1001lm White/White Ø91x91 F - H Ø100 - Dimmable	15,5	1001	65	3000	50000	36°
9172442	LED Surface Spot Cubo 1V 15,5W 3000K CRI>90 36D 899lm Black/Black Ø91x91 F - H Ø100 - Dimmable	15,5	899	58	3000	50000	36°
9172444	LED Surface Spot Cubo 2V 2x15,5W 2700K CRI>90 36D 2x810lm Black/Black Ø175x91 F - H Ø100 - Dimmable	31	1620	52	2700	50000	36°
9172443	LED Surface Spot Cubo 2V 2x15,5W 2700K CRI>90 36D 2x977lm White/White Ø175x91 F - H Ø100 - Dimmable	31	1954	63	2700	50000	36°
9172445	LED Surface Spot Cubo 2V 2x15,5W 3000K CRI>90 36D 2x1001lm White/White Ø175x91 F - H Ø100 - Dimmable	31	2002	65	3000	50000	36°
9172446	LED Surface Spot Cubo 2V 2x15,5W 3000K CRI>90 36D 2x899lm Black/Black Ø175x91 F - H Ø100 - Dimmable	31	1798	58	3000	50000	36°


* Bruto lumen

DIMENSIONS

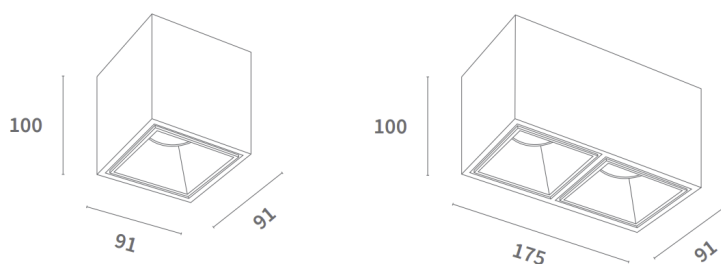

PHOTOMETRIC SPECIFICATIONS

LED SURFACE SPOT CUBO 15.5W 2700K 36D

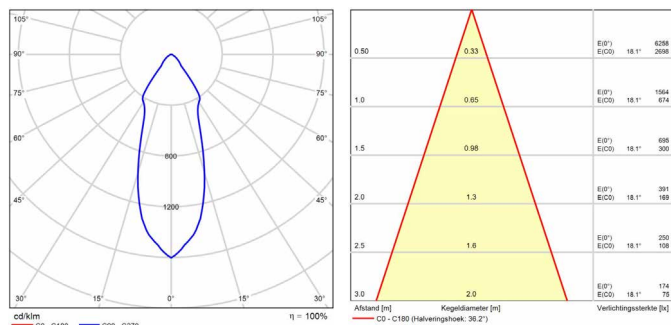

PRAGMALUX

All rights reserved. Pragmalux - PDL Lighting Group B.V. retains the right to modify product specifications without any prior notice or obligation and does not assume any liability for any consequences of using this document. Subject to errors and printing errors. Luminous flux tolerance: +/- 10%. Power consumption tolerance: +/- 10%.

Version: October 2020

