


AURA LED GU10 SPOT

PRAGMALUX
PROFESSIONAL LIGHTING

3 PRAGMALUX
YEAR
WARRANTY

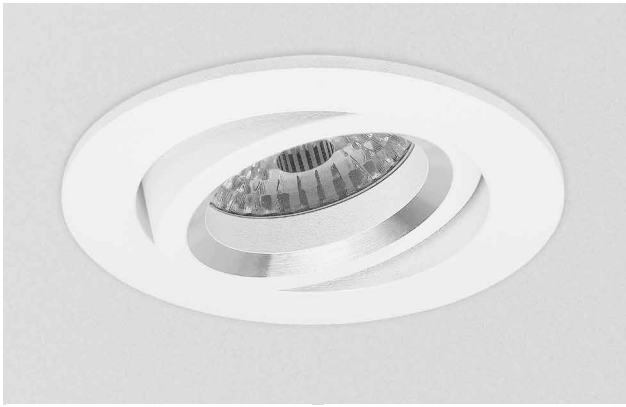

KEY FEATURES


- High quality recessed spot made of aluminum
- 360° rotatable and 40° tiltable
- Removable inner ring for easy installation
- Powder coating finish

IP20 IK02 GU10 220V
230V



DIMENSIONS

23 mm



INSTALLATION
69 mm

DIMENSIONS
82 mm



COLORS



ACCESSORIES




Honeycomb
4608204



Blade clips
4607849

COMPATIBLE LAMPS



GU10 LED LED module

OPTIONS



SPECIFICATIONS

ITEM CODE	DESCRIPTION	EQUIVALENT	COLOR
4600123	Aura MR16 Spot White Ø82mm Cutout Ø69mm 40° Tilttable (Incl. GU10 Fitting)	50W HAL	White
4600130	Aura MR16 Spot Black Ø82mm Cutout Ø69mm 40° Tilttable (Incl. GU10 Fitting)	50W HAL	Black
4600116	Aura MR16 Spot Aluminum Ø82mm Cutout Ø69mm 40° Tilttable (Incl. GU10 Fitting)	50W HAL	Brushed Alu
4600147	Aura MR16 Spot Nickel Ø82mm Cutout Ø69mm 40° Tilttable (Incl. GU10 Fitting)	50W HAL	Nickel

TECHNICAL DATA

ELECTRICAL DATA	
Voltage (V)	220-240
Frequency (Hz)	50/60
Max. Power (W)	50
Operating mode	GU10 fitting (included)
Electrical connection	2x 0.75mm ² wire

COLORS & MATERIALS	
Color (Housing)	White, Black, Aluminum, Nickel
Material (Housing)	Aluminum

CERTIFICATES & STANDARDS

Fixture certificates	CE
Ingress protection	IP20
Protection class IK	IK02


CAPABILITIES

Type of connection	GU10 with 18cm cable
Installation	40° Tilttable

PRAGMALUX

All rights reserved. Pragmalux - PDL Lighting Group B.V. retains the right to modify product specifications without any prior notice or obligation and does not assume any liability for any consequences of using this document. Subject to errors and printing errors. Luminous flux tolerance: +/- 10%. Power consumption tolerance: +/- 10%.

Version: October 2020



874/2012